

HGX34/150-4 S CO2 T

Engine: 380-420V Y/YY -3- 50Hz PW

Refrigerant: R744

Subject: Предварительный расчет

Performance data

Application: Refrigeration & AC

Refrigerant	R744	Compressor refrigeration capacity	40.20 kW
Reference temperature	Dew point	Evaporator refrigeration capacity	40.20 kW
Supply frequency	50 Hz	Power consumption	15.40 kW
Power supply	50 Hz, 400 V	Current draw (400 V)	27.70 A
Evaporating temperature	0.1 °C	Coefficient of performance (COP/EER)	2.59
Evaporating pressure (abs.)	34.94 bar	Gas cooler heat rejection	55.60 kW
High pressure (abs.)	90.00 bar	Mass flow	0.270 kg/s
Gas cooler outlet temperature	35.0 °C	Discharge end temperature	93.6 °C ¹⁾
Suction gas superheat	10 K		
Subcooling (outside cond.)	-- K		
Usable superheat	100%		

Certifications



ASERCOM certified performance data

The performance data of compressors bearing this label has been certified to the strict requirements of ASERCOM.

ASERCOM is the Association of European Refrigeration Compressors and Controls Manufacturers. Information about the Association and the constantly updated overview of certified Bock compressors can be found at www.asercom.org.

This certification is based on EN 12900. This signifies: 10 K suction gas superheat without liquid subcooling at 50 Hz power supply frequency.

¹⁾ The stated value of the discharge end temperature is a mere calculated value. Additional cooling and heat dissipation are not considered. Deviations (particularly in deep freezing applications) from the real measured discharge temperature during operation are possible.

Subject to change without notice

To: Промышленная Холодильная
Компания info@phk-holod.ru

From:

26.10.2022
Page 1 of 9

VAP 11.12.0


HGX34/150-4 S CO2 T


Engine: 380-420V Y/YY -3- 50Hz PW

Refrigerant: R744

Subject: Предварительный расчет

Operating limits

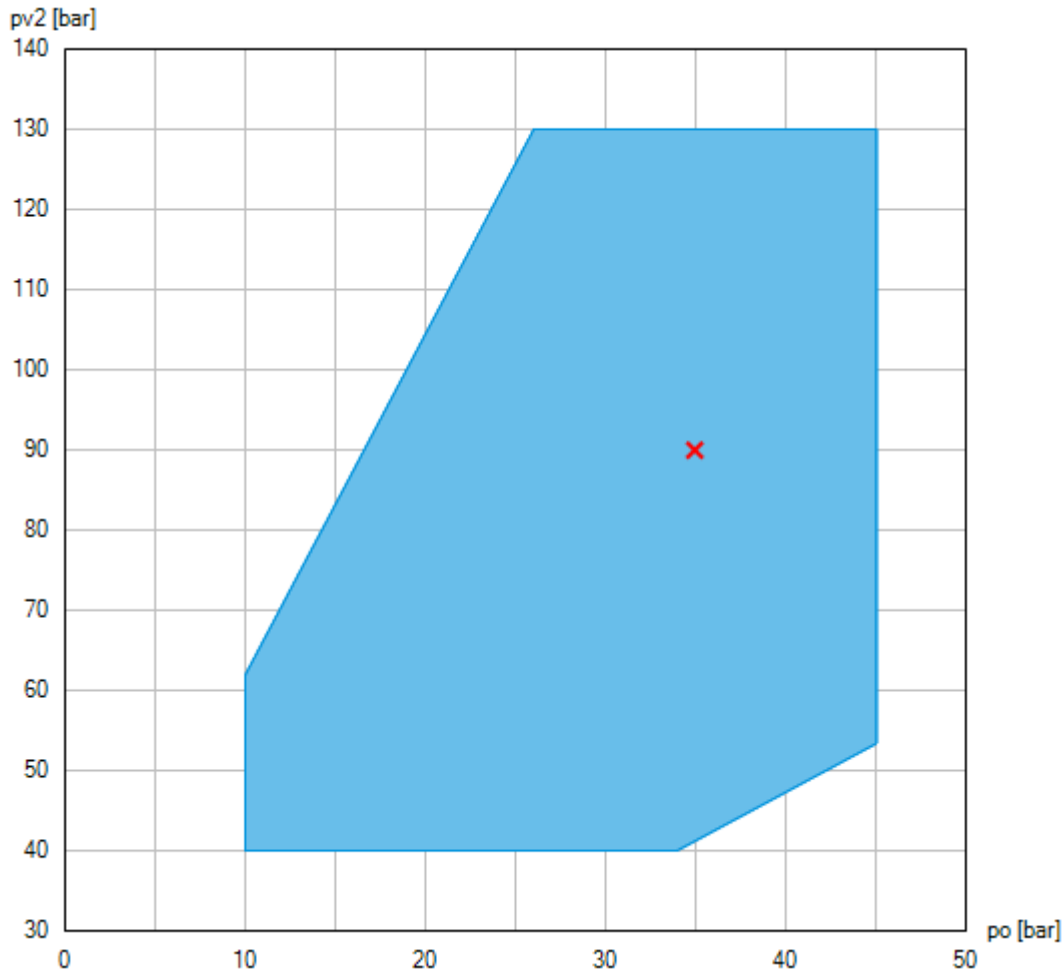

 Unlimited application range (compressor with DCR22 CO2 flexxCO2NTROL permitted - range preliminary)

Compressor operation is possible within the limits shown on the diagrams of application. Compressor application limits should not be chosen for design purposes or continuous operation.

Subject to change without notice

To: Промышленная Холодильная
Компания info@phk-holod.ru

From:

26.10.2022
Page 2 of 9

VAP 11.12.0

HGX34/150-4 S CO2 T

Engine: 380-420V Y/YY -3- 50Hz PW

Refrigerant: R744

Subject: Предварительный расчет

Technical data

Number of cylinders / Bore / Stroke	4 / 32 mm / 46 mm
Displacement 50/60 Hz (1450/1740 ¹ /min)	12,90 / 15,40 m ³ /h
Voltage ¹⁾	380-420V Y/YY -3- 50Hz PW
	440-480V Y/YY -3- 60Hz PW
Winding divided into	50% / 50%
Max. working current ²⁾	37.8 A
Max. power consumption ²⁾	22.5 kW
Starting current (rotor blocked) ²⁾	125.0 / 209.0 A
Motor protection	INT69 G
Protection terminal box	IP 65
Weight	207 kg
Frequency range ³⁾	20 - 70 Hz
Max. permissible overpressure (g) (LP/HP) ⁴⁾	100 / 150 bar
Connection suction line SV	28 mm - 1 1/8 "
Connection discharge line DV	22 mm - 7/8 "
Lubrication	Oil pump
Oil type R744	BOCKlub E85
Oil charge	2,3 Ltr.
Dimensions Length / Width / Height	708 / 417 / 393 mm
Sound power level L _{WA} ⁵⁾	75 dB(A) @ -10 °C / 15 °C / 10 K
	75 dB(A) @ -10 °C / 90 bar / 10 K
	75 dB(A) @ +5 °C / 100 bar / 10 K
Sound pressure level L _{pA} ⁵⁾	62 dB(A) @ -10 °C / 15 °C / 10 K
	62 dB(A) @ -10 °C / 90 bar / 10 K
	62 dB(A) @ +5 °C / 100 bar / 10 K

1) Tolerance (± 10%) relates to the mean value of the voltage range. Other voltages and current types on request

All data are based on voltage rms values

2) - The stated value for the max. power consumption is valid for the adjusted power supply.

- Starting current (rotor blocked):

- Part winding (PW) motors: Winding 1 / Winding 1+2
- Delta/Star (Δ/Y) motors: Δ / Y

- Take account of the max. operating current / max. power consumption for designing motor contractors, feed lines, fuses and motor protection switches. Motor contractors: Consumption category AC3.

Subject to change without notice

To: Промышленная Холодильная
Компания info@phk-holod.ru

From:

26.10.2022
Page 3 of 9

VAP 11.12.0

HGX34/150-4 S CO2 T

Engine: 380-420V Y/YY -3- 50Hz PW

Refrigerant: R744

Subject: Предварительный расчет

- 3) The maximum permissible working current of the compressor (I_{max}) must not be exceeded. Take account of the guidelines for use of frequency inverter (see compressor assembly instruction or selection software).
- 4) LP = Low pressure
HP = High pressure
- 5) Declared dual-number noise emission values are in accordance with ISO 4871. The corresponding uncertainty to the sound power level is $K_{WA} = 2,5$ dB and to the sound pressure level is $K_{pA} = 2,5$ dB. The values are valid for 50 Hz with the refrigerant R744 at the standard rating points according to EN 12900.
 - A-weighted sound power level L_{WA} (re 1 pW), in decibel. To determine the values, measurement methods of the ISO 3740 standard with accuracy class 2 or higher were used.
 - A-weighted sound pressure level L_{pA} (re 20 μ Pa), in decibel. The values are calculated from the sound power level in accordance with ISO 11203: $L_{pA} = L_{WA} - Q_2$ at a distance of $d = 1$ m to the reference box.

Subject to change without notice

To: Промышленная Холодильная
Компания info@phk-holod.ru

From:

26.10.2022
Page 4 of 9

VAP 11.12.0

HGX34/150-4 S CO2 T

Engine: 380-420V Y/YY -3- 50Hz PW

Refrigerant: R744

Subject: Предварительный расчет

Performance data table

Application: Refrigeration & AC

Supply frequency: 50 Hz

Voltage: 400 V

Suction gas superheat: 10 K

Subcooling (outside cond.): -- K

Subcritical

tc [°C]		to [°C]									
		5.0	0.0	-5.0	-10.0	-15.0	-20.0	-25.0	-30.0	-35.0	-40.0
10.0	Q [W]		67300	57100	48100	40200	33200	27200	22000	17600	13700
	P [kW]		5.40	6.51	7.36	7.96	8.31	8.44	8.35	8.05	7.56
	I [A]		16.30	17.40	18.20	18.80	19.10	19.30	19.20	18.90	18.40
15.0	Q [W]	72400	61900	52500	44100	36800	30400	24800	20000	15900	12400
	P [kW]	5.87	7.06	8.00	8.68	9.11	9.32	9.31	9.08	8.66	8.05
	I [A]	16.80	17.90	18.80	19.50	20.00	20.20	20.20	19.90	19.50	18.90
20.0	Q [W]	65700	56100	47600	40000	33300	27400	22300	18000	14300	11100
	P [kW]	7.75	8.75	9.49	9.99	10.20	10.30	10.10	9.79	9.24	8.52
	I [A]	18.60	19.60	20.40	20.90	21.20	21.30	21.10	20.70	20.10	19.40
25.0	Q [W]	58100	49700	42000	35300	29300	24100	19600	15800	12500	
	P [kW]	9.65	10.40	10.90	11.30	11.40	11.20	10.90	10.40	9.79	
	I [A]	20.60	21.40	22.10	22.40	22.60	22.40	22.10	21.50	20.70	
30.0	Q [W]	47200	40300	34100	28600	23800	19500	15900	12800		
	P [kW]	11.50	12.10	12.40	12.60	12.50	12.20	11.70	11.10		
	I [A]	22.70	23.40	23.80	24.00	23.90	23.60	23.00	22.20		

Transcritical

tga [°C]		to [°C]									
		5.0	0.0	-5.0	-10.0	-15.0	-20.0	-25.0	-30.0	-35.0	-40.0
30	pV2 [bar]	75	75	75	75	75	75	75	75		
	Q [W]	51100	43600	36800	30900	25700	21100	17200	13800		
	P [kW]	12.20	12.70	13.00	13.00	12.90	12.50	12.00	11.30		
	I [A]	23.50	24.10	24.50	24.50	24.40	23.90	23.30	22.50		
35	pV2 [bar]	85	90	90	90	90	90	90	80		
	Q [W]	44300	40000	33800	28400	23500	19400	15700	8300		
	P [kW]	14.30	15.40	15.40	15.10	14.60	14.00	13.20	11.70		
	I [A]	26.20	27.70	27.60	27.20	26.60	25.80	24.80	22.90		
40	pV2 [bar]	100	100	105	105	105	100	90			
	Q [W]	41500	35400	30900	25900	21600	17200	11100			
	P [kW]	17.10	17.10	17.40	16.90	16.20	14.90	13.20			
	I [A]	30.00	29.90	30.40	29.70	28.70	27.00	24.80			
45	pV2 [bar]	115	115	115	120	115	100				
	Q [W]	38100	32600	27600	23700	19300	12700				
	P [kW]	19.70	19.30	18.70	18.60	17.20	14.90				
	I [A]	33.60	33.10	32.30	32.10	30.10	27.00				
50	pV2 [bar]	130	130	130	130	115	100				
	Q [W]	34800	29800	25300	21300	15600	8190				
	P [kW]	22.00	21.40	20.60	19.70	17.20	14.90				
	I [A]	37.20	36.30	35.10	33.70	30.10	27.00				

Subject to change without notice

To: Промышленная Холодильная
Компания info@phk-holod.ru

From:

26.10.2022
Page 5 of 9

VAP 11.12.0

HGX34/150-4 S CO2 T

Engine: 380-420V Y/YY -3- 50Hz PW

Refrigerant: R744

Subject: Предварительный расчет



Optimal high pressure is outside of the operating limits. Performance data are indicated at maximal possible high pressure.

t_o Evaporating temperature
t_c Condensing temperature
t_{ga} Gas cooler outlet temperature
p_{V2} High pressure (abs.)
Q Compressor refrigeration capacity
P Power consumption
I Current draw

Subject to change without notice

To: Промышленная Холодильная
Компания info@phk-holod.ru

From:

26.10.2022
Page 6 of 9

VAP 11.12.0


HGX34/150-4 S CO2 T

Engine: 380-420V Y/YY -3- 50Hz PW

Refrigerant: R744

Subject: Предварительный расчет

Dimensions and connections

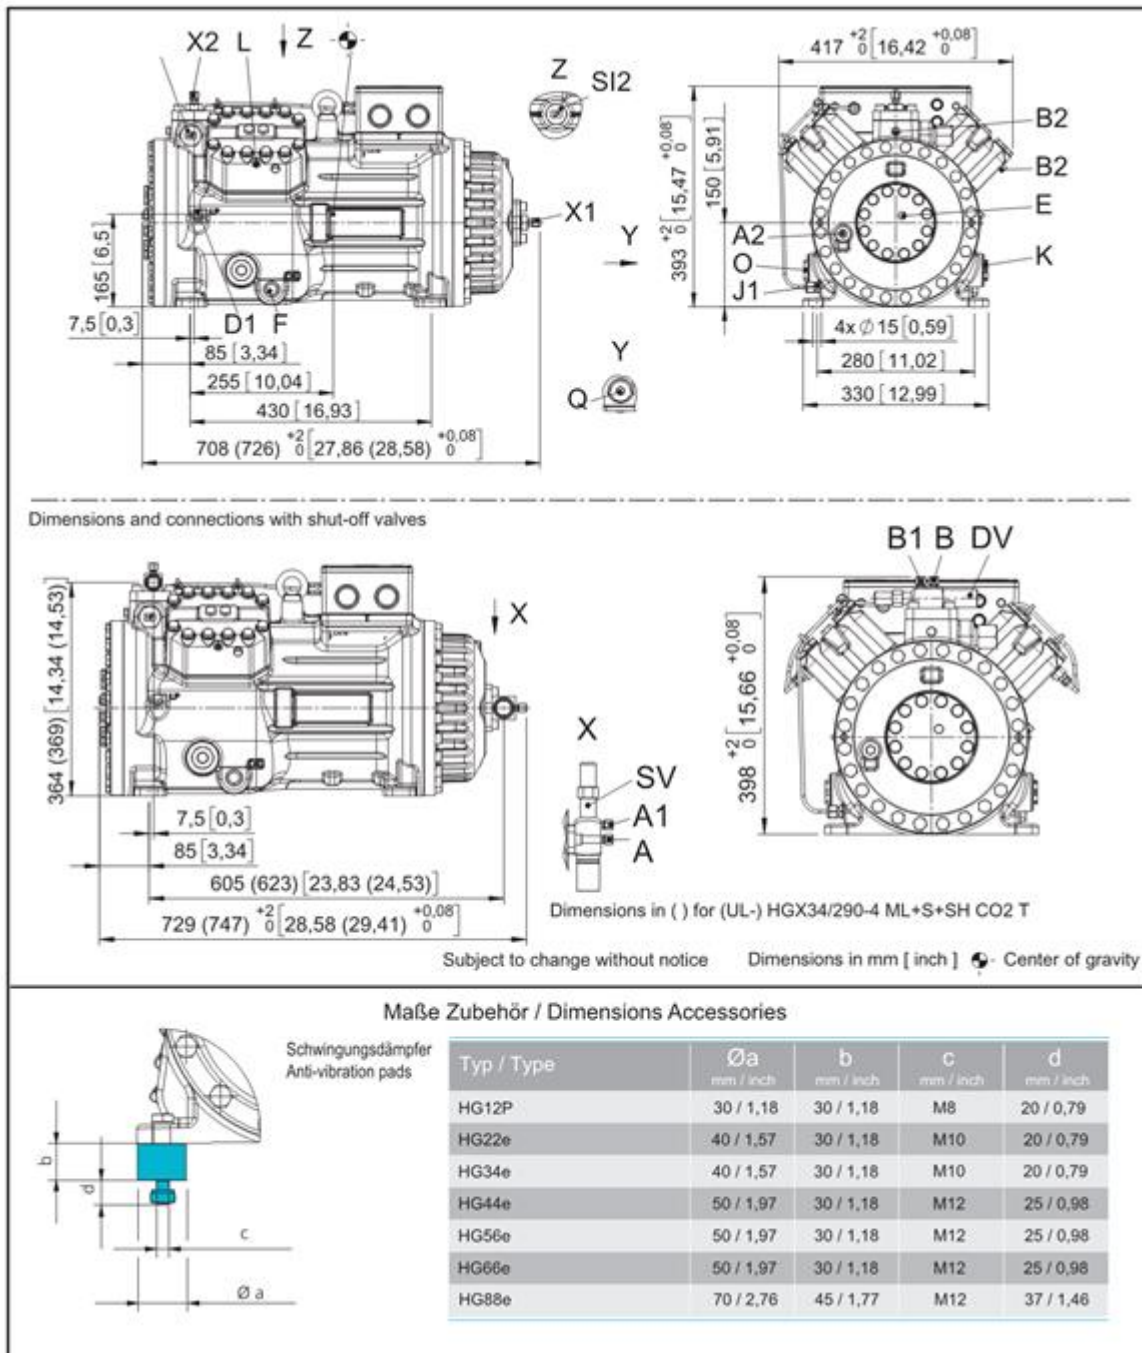

Subject to change without notice

To: Промышленная Холодильная
Компания info@phk-holod.ru

From:

26.10.2022
Page 7 of 9

VAP 11.12.0

HGX34/150-4 S CO2 T

Engine: 380-420V Y/YY -3- 50Hz PW

Refrigerant: R744

Subject: Предварительный расчет

SV	Suction connection, tube \varnothing ¹⁾	28 mm - 1 1/8 "
DV	Discharge connection, tube \varnothing ¹⁾	22 mm - 7/8 "
A	Connection suction side, not lockable	7/16" UNF
A1	Connection suction side, lockable	7/16" UNF
A2	Connection suction side, not lockable	1/8" NPTF
B	Connection discharge side, not lockable	7/16" UNF
B1	Connection discharge side, lockable	7/16" UNF
B2	Connection discharge side, not lockable	1/8" NPTF
D1	Connection oil return from oil separator	1/4" NPTF
E	Connection oil pressure gauge	1/8" NPTF
F	Oil drain	M22x1,5
J1	Oil sump heater	3/8" NPTF
K	Sight glass	1 1/8 " - 18 UNEF
L	Connection thermal protection thermostat ²⁾	1/8" NPTF
O	Connection oil level regulator	1 1/8 " - 18 UNEF
Q	Connection oil temperature sensor	1/8" NPTF
SI1	Decompression valve HP	M24x1,5
SI2	Decompression valve LP	M22x1,5
X1	Connection for schrader valve, suction side	7/16" UNF
X2	Connection for schrader valve, discharge side	7/16" UNF

1) Solder/ Welding connection, cutting ring

2) No connection discharge side

Subject to change without notice

To: Промышленная Холодильная
Компания info@phk-holod.ru

From:

26.10.2022
Page 8 of 9

VAP 11.12.0

HGX34/150-4 S CO2 T

Engine: 380-420V Y/YY -3- 50Hz PW

Refrigerant: R744

Subject: Предварительный расчет

BOCK colour the world
of tomorrow

Product photo

Picture similar and/or with accessories.



Subject to change without notice

To: Промышленная Холодильная
Компания info@phk-holod.ru

From:

26.10.2022
Page 9 of 9

VAP 11.12.0