

HGX34/170-4 ML CO2 T

Engine: 380-420V Y/YY -3- 50Hz PW

Refrigerant: R744

Subject: Предварительный расчет

Performance data

Application: Refrigeration & AC

Refrigerant	R744	Compressor refrigeration capacity	44.70 kW
Reference temperature	Dew point	Evaporator refrigeration capacity	44.70 kW
Supply frequency	50 Hz	Power consumption	17.60 kW
Power supply	50 Hz, 400 V	Current draw (400 V)	29.30 A
Evaporating temperature	0.1 °C	Coefficient of performance (COP/EER)	2.54
<i>Evaporating pressure (abs.)</i>	<i>34.94 bar</i>	Gas cooler heat rejection	62.30 kW
High pressure (abs.)	90.00 bar	Mass flow	0.301 kg/s
Gas cooler outlet temperature	35.0 °C	Discharge end temperature	94.4 °C ¹⁾
Suction gas superheat	10 K		
Subcooling (outside cond.)	-- K		
Usable superheat	100%		

1) The stated value of the discharge end temperature is a mere calculated value. Additional cooling and heat dissipation are not considered. Deviations (particularly in deep freezing applications) from the real measured discharge temperature during operation are possible.

Subject to change without notice

To: Промышленная Холодильная
Компания info@phk-holod.ru

From:

26.10.2022
Page 1 of 9

VAP 11.12.0


HGX34/170-4 ML CO2 T


Engine: 380-420V Y/YY -3- 50Hz PW

Refrigerant: R744

Subject: Предварительный расчет

Operating limits

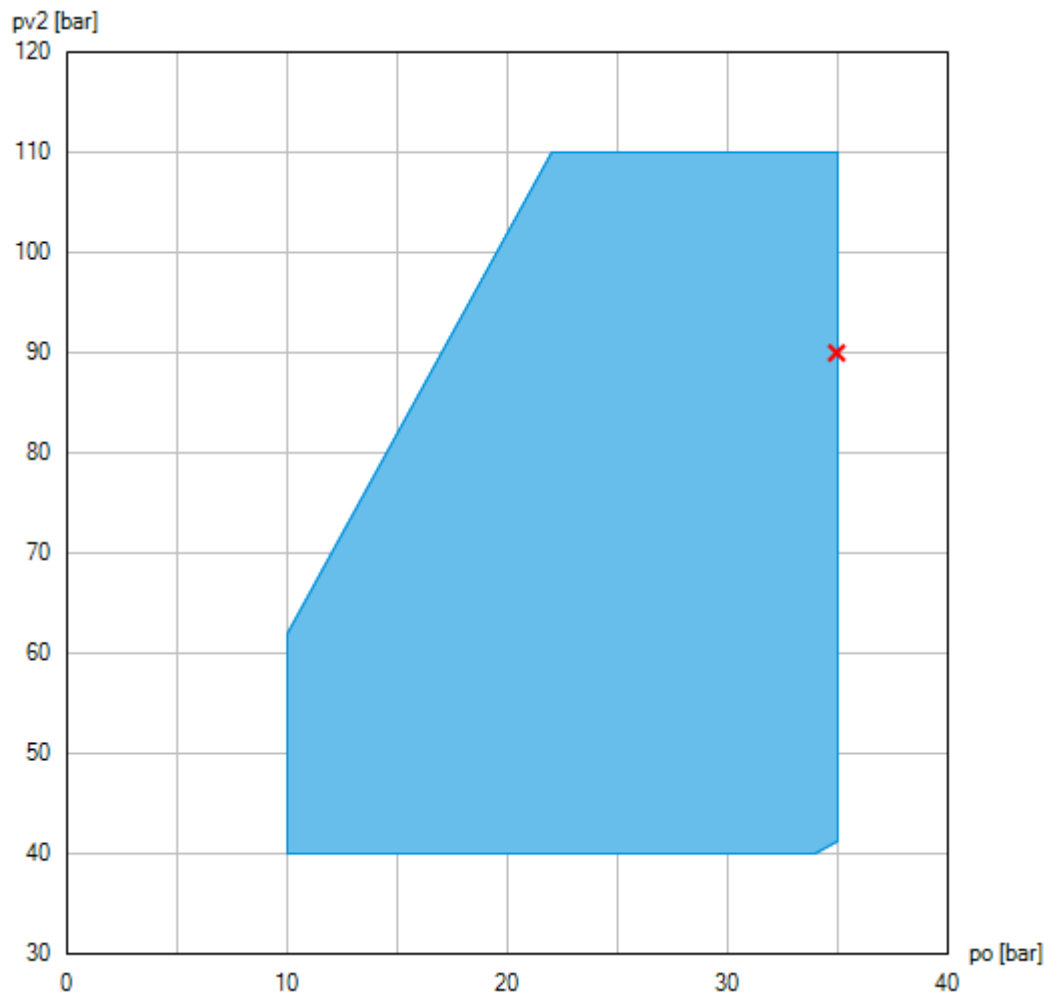

 Unlimited application range (compressor with DCR22 CO2 flexxCO2NTROL permitted - range preliminary)

Compressor operation is possible within the limits shown on the diagrams of application. Compressor application limits should not be chosen for design purposes or continuous operation.

Subject to change without notice

To: Промышленная Холодильная
Компания info@phk-holod.ru

From:

26.10.2022
Page 2 of 9

VAP 11.12.0

HGX34/170-4 ML CO2 T

Engine: 380-420V Y/YY -3- 50Hz PW

Refrigerant: R744

Subject: Предварительный расчет

Technical data

Number of cylinders / Bore / Stroke	4 / 34 mm / 46 mm
Displacement 50/60 Hz (1450/1740 ¹ /min)	14,50 / 17,40 m ³ /h
Voltage ¹⁾	380-420V Y/YY -3- 50Hz PW
	440-480V Y/YY -3- 60Hz PW
Winding divided into	50% / 50%
Max. working current ²⁾	35.3 A
Max. power consumption ²⁾	21.4 kW
Starting current (rotor blocked) ²⁾	101.0 / 174.0 A
Motor protection	INT69 G
Protection terminal box	IP 65
Weight	199 kg
Frequency range ³⁾	20 - 70 Hz
Max. permissible overpressure (g) (LP/HP) ⁴⁾	100 / 150 bar
Connection suction line SV	28 mm - 1 1/8 "
Connection discharge line DV	22 mm - 7/8 "
Lubrication	Oil pump
Oil type R744	BOCKlub E85
Oil charge	2,3 Ltr.
Dimensions Length / Width / Height	708 / 417 / 393 mm
Sound power level L _{WA} ⁵⁾	76 dB(A) @ -10 °C / 15 °C / 10 K
	76 dB(A) @ -10 °C / 90 bar / 10 K
Sound pressure level L _{pA} ⁵⁾	63 dB(A) @ -10 °C / 15 °C / 10 K
	63 dB(A) @ -10 °C / 90 bar / 10 K

1) Tolerance ($\pm 10\%$) relates to the mean value of the voltage range. Other voltages and current types on request

All data are based on voltage rms values

2) - The stated value for the max. power consumption is valid for the adjusted power supply.

- Starting current (rotor blocked):

- Part winding (PW) motors: Winding 1 / Winding 1+2
- Delta/Star (Δ/Y) motors: Δ / Y

- Take account of the max. operating current / max. power consumption for designing motor contractors, feed lines, fuses and motor protection switches. Motor contractors: Consumption category AC3.

3) The maximum permissible working current of the compressor (I_{max}) must not be exceeded. Take account of the guidelines for use of frequency inverter (see compressor assembly instruction or selection software).

Subject to change without notice

To: Промышленная Холодильная
Компания info@phk-holod.ru

From:

26.10.2022
Page 3 of 9

VAP 11.12.0

HGX34/170-4 ML CO2 T

Engine: 380-420V Y/YY -3- 50Hz PW

Refrigerant: R744

Subject: Предварительный расчет

-
- 4) LP = Low pressure
HP = High pressure
- 5) Declared dual-number noise emission values are in accordance with ISO 4871. The corresponding uncertainty to the sound power level is $K_{WA} = 2,5$ dB and to the sound pressure level is $K_{pA} = 2,5$ dB. The values are valid for 50 Hz with the refrigerant R744 at the standard rating points according to EN 12900.
- A-weighted sound power level L_{WA} (re 1 pW), in decibel. To determine the values, measurement methods of the ISO 3740 standard with accuracy class 2 or higher were used.
 - A-weighted sound pressure level L_{pA} (re 20 μ Pa), in decibel. The values are calculated from the sound power level in accordance with ISO 11203: $L_{pA} = L_{WA} - Q_2$ at a distance of $d = 1$ m to the reference box.

Subject to change without notice

To: Промышленная Холодильная
Компания info@phk-holod.ru

From:

26.10.2022
Page 4 of 9

VAP 11.12.0

HGX34/170-4 ML CO2 T

Engine: 380-420V Y/YY -3- 50Hz PW

Refrigerant: R744

Subject: Предварительный расчет

Performance data table

Application: Refrigeration & AC

Supply frequency: 50 Hz

Voltage: 400 V

Suction gas superheat: 10 K

Subcooling (outside cond.): -- K

Subcritical

tc [°C]		to [°C]								
		0.0	-5.0	-10.0	-15.0	-20.0	-25.0	-30.0	-35.0	-40.0
10.0	Q [W]	75400	64200	54200	45400	37600	30900	25000	20000	15700
	P [kW]	5.89	7.14	8.08	8.73	9.12	9.26	9.18	8.89	8.41
	I [A]	14.40	15.60	16.60	17.30	17.80	17.90	17.80	17.50	17.00
15.0	Q [W]	69300	59000	49800	41600	34400	28200	22800	18100	14200
	P [kW]	7.78	8.83	9.58	10.00	10.20	10.20	10.00	9.59	8.98
	I [A]	16.30	17.40	18.30	18.90	19.10	19.10	18.80	18.30	17.60
20.0	Q [W]	62900	53500	45100	37600	31100	25400	20500	16300	12700
	P [kW]	9.71	10.50	11.10	11.30	11.40	11.20	10.80	10.20	9.53
	I [A]	18.50	19.50	20.10	20.50	20.60	20.30	19.80	19.10	18.20
25.0	Q [W]	55600	47300	39800	33200	27400	22300	18000	14200	
	P [kW]	11.60	12.20	12.60	12.70	12.50	12.20	11.60	10.90	
	I [A]	20.90	21.70	22.10	22.20	22.00	21.60	20.90	19.90	
30.0	Q [W]	45100	38400	32300	26900	22100	18000	14500		
	P [kW]	13.60	14.00	14.10	14.00	13.60	13.10	12.40		
	I [A]	23.50	24.00	24.20	24.10	23.60	22.80	21.90		

Transcritical

tga [°C]		to [°C]								
		0.0	-5.0	-10.0	-15.0	-20.0	-25.0	-30.0	-35.0	-40.0
30	pV2 [bar]	75	75	75	75	75	75	75		
	Q [W]	48800	41500	34900	29000	23900	19400	15600		
	P [kW]	14.30	14.60	14.60	14.40	14.00	13.40	12.70		
	I [A]	24.50	24.90	25.00	24.70	24.10	23.30	22.20		
35	pV2 [bar]	90	90	90	90	90	85			
	Q [W]	44600	37800	31800	26500	21800	16800			
	P [kW]	17.60	17.50	17.10	16.60	15.90	14.50			
	I [A]	29.30	29.20	28.70	27.90	26.80	24.70			
40	pV2 [bar]	100	105	105	105	100	85			
	Q [W]	39300	34400	28900	24000	19200	8410			
	P [kW]	19.50	20.00	19.40	18.50	17.00	14.50			
	I [A]	32.40	33.20	32.10	30.80	28.40	24.70			
45	pV2 [bar]	110	110	110	110	100				
	Q [W]	34700	29400	24700	20600	14200				
	P [kW]	21.40	20.80	20.10	19.10	17.00				
	I [A]	35.40	34.50	33.30	31.80	28.40				
50	pV2 [bar]	110	110	110	110	100				
	Q [W]	26500	22500	19000	15800	9150				
	P [kW]	21.40	20.80	20.10	19.10	17.00				
	I [A]	35.40	34.50	33.30	31.80	28.40				

Subject to change without notice

To: Промышленная Холодильная
Компания info@phk-holod.ru

From:

26.10.2022
Page 5 of 9

VAP 11.12.0

HGX34/170-4 ML CO2 T

Engine: 380-420V Y/YY -3- 50Hz PW

Refrigerant: R744

Subject: Предварительный расчет



Optimal high pressure is outside of the operating limits. Performance data are indicated at maximal possible high pressure.

<i>t_o</i>	Evaporating temperature
<i>t_c</i>	Condensing temperature
<i>t_{ga}</i>	Gas cooler outlet temperature
<i>p_{V2}</i>	High pressure (abs.)
<i>Q</i>	Compressor refrigeration capacity
<i>P</i>	Power consumption
<i>I</i>	Current draw

Subject to change without notice

To: Промышленная Холодильная
Компания info@phk-holod.ru

From:

26.10.2022
Page 6 of 9

VAP 11.12.0


HGX34/170-4 ML CO2 T

Engine: 380-420V Y/YY -3- 50Hz PW

Refrigerant: R744

Subject: Предварительный расчет

Dimensions and connections

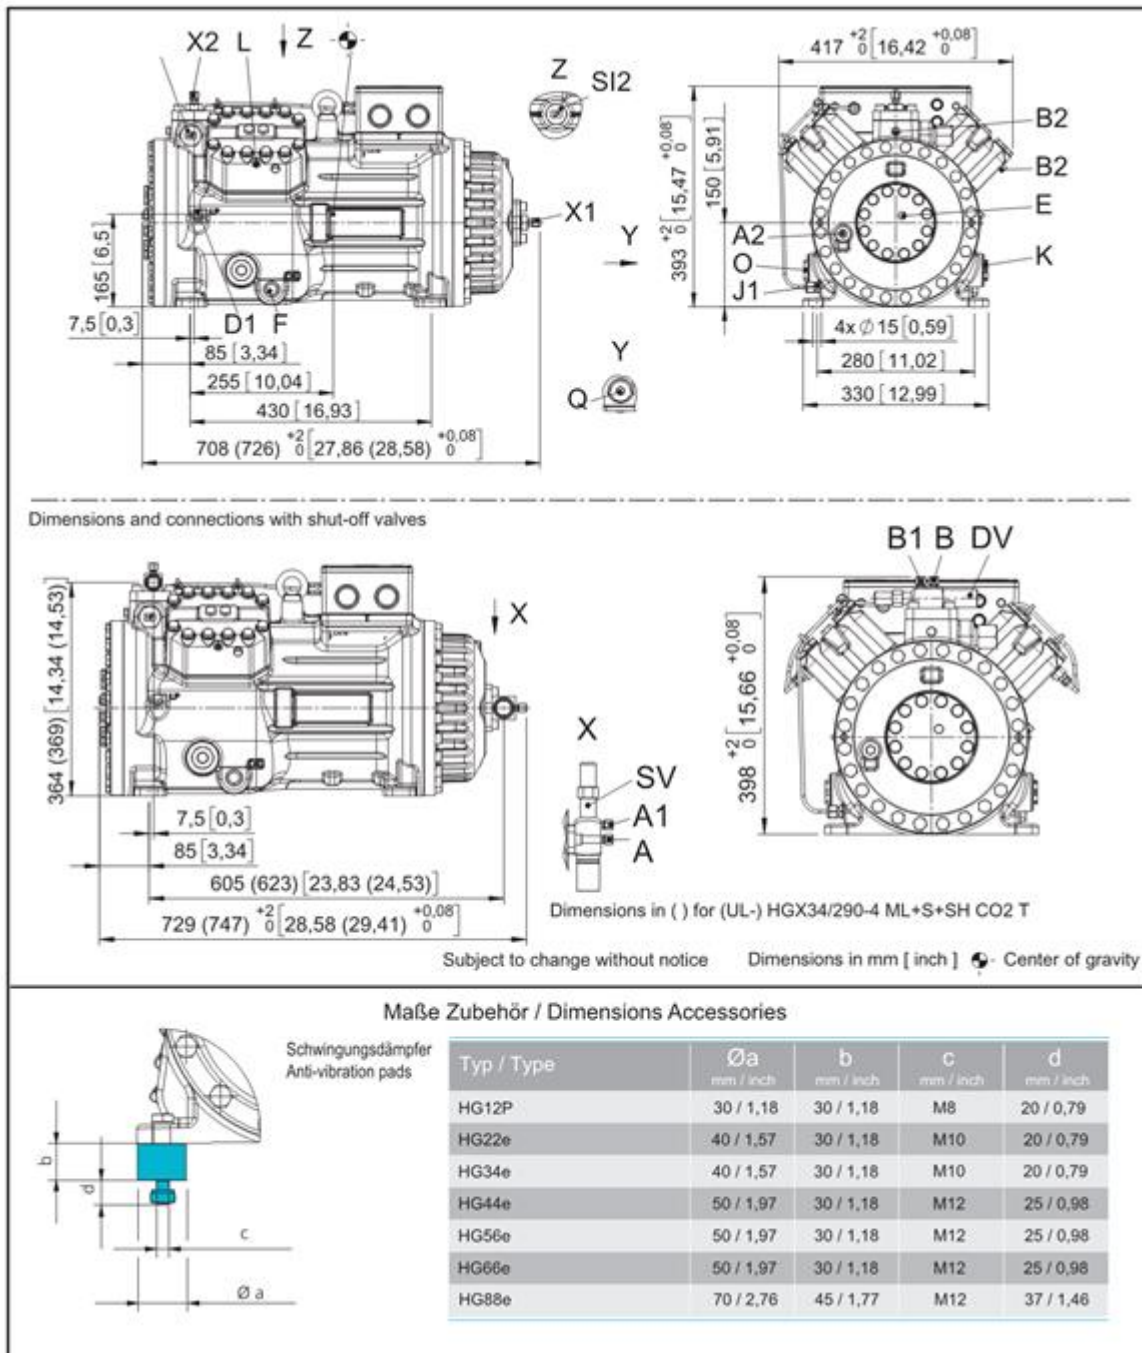

Subject to change without notice

To: Промышленная Холодильная
Компания info@phk-holod.ru

From:

26.10.2022
Page 7 of 9

VAP 11.12.0

HGX34/170-4 ML CO2 T

Engine: 380-420V Y/YY -3- 50Hz PW

Refrigerant: R744

Subject: Предварительный расчет

SV	Suction connection, tube \varnothing ¹⁾	28 mm - 1 1/8 "
DV	Discharge connection, tube \varnothing ¹⁾	22 mm - 7/8 "
A	Connection suction side, not lockable	7/16" UNF
A1	Connection suction side, lockable	7/16" UNF
A2	Connection suction side, not lockable	1/8" NPTF
B	Connection discharge side, not lockable	7/16" UNF
B1	Connection discharge side, lockable	7/16" UNF
B2	Connection discharge side, not lockable	1/8" NPTF
D1	Connection oil return from oil separator	1/4" NPTF
E	Connection oil pressure gauge	1/8" NPTF
F	Oil drain	M22x1,5
J1	Oil sump heater	3/8" NPTF
K	Sight glass	1 1/8 " - 18 UNEF
L	Connection thermal protection thermostat ²⁾	1/8" NPTF
O	Connection oil level regulator	1 1/8 " - 18 UNEF
Q	Connection oil temperature sensor	1/8" NPTF
SI1	Decompression valve HP	M24x1,5
SI2	Decompression valve LP	M22x1,5
X1	Connection for schrader valve, suction side	7/16" UNF
X2	Connection for schrader valve, discharge side	7/16" UNF

1) Solder/ Welding connection, cutting ring

2) No connection discharge side

Subject to change without notice

To: Промышленная Холодильная
Компания info@phk-holod.ru

From:

26.10.2022
Page 8 of 9

VAP 11.12.0

HGX34/170-4 ML CO2 T

Engine: 380-420V Y/YY -3- 50Hz PW

Refrigerant: R744

Subject: Предварительный расчет

BOCK colour the world
of tomorrow

Product photo

Picture similar and/or with accessories.



Subject to change without notice

To: Промышленная Холодильная
Компания info@phk-holod.ru

From:

26.10.2022
Page 9 of 9

VAP 11.12.0