

HMK80AA KAPPA LBP Compressor High Efficiency R600a 220-240V 50Hz

General

Code number	CDO00029
Approvals	EN 60335-2-34 w. Annex AA
Compressors on pallet	100

Application

Application	LBP		
Frequency	Hz	50	60
Evaporating temperature	°C	-35 to -5	—
Voltage range	V	187 to 264	—
Max. condensing temperature continuous (short)	°C	60 (70)	—
Max. winding temperature continuous (short)	°C	130 (130)	—

Cooling requirements

Frequency	Hz	50			60		
Application		LBP	MBP	HBP	LBP	MBP	HBP
32°C		S	—	—	—	—	—
38°C		S	—	—	—	—	—
43°C		S	—	—	—	—	—
Remarks on application:							

Motor


Motor type	RSIR		
LRA (rated after 4 sec. UL984), HST LST	A	—	3.5
Cut in Current, HST LST	A	—	12.8
Resistance, main start winding (25°C)	Ω	29.5	18.6

Design




Displacement	cm ³	8.10
Oil quantity (type)	cm ³	165 (mineral)
Maximum refrigerant charge	g	150
Free gas volume in compressor	cm ³	1520
Weight without electrical equipment	kg	7.6

Dimensions

Height	mm	A	159.0
		B	165.5
Suction connector	location/I.D. mm angle	C	6.15 35°
	material comment	Copper Rubber plug	
Process connector	location/O.D. mm angle	D	6.00 35°
	material comment	Copper Rubber plug	
Discharge connector	location/I.D. mm angle	E	5.15 40°
	material comment	Copper Rubber plug	
Oil cooler connector	location/I.D. mm angle	F	–
	material comment	–	
Connector tolerance	I.D. mm	±0.05	
Remarks:			

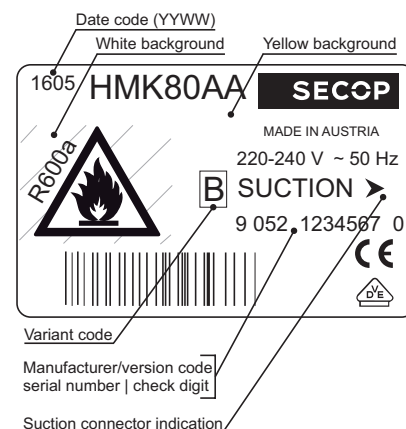

- S = Static cooling normally sufficient
- O = Oil cooling
- F₁ = Fan cooling 1.5 m/s (compressor compartment temperature equal to ambient temperature)
- F₂ = Fan cooling 3.0 m/s necessary
- SG = Suction gas cooling normally sufficient
- = not applicable in this area

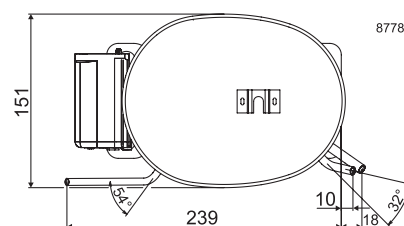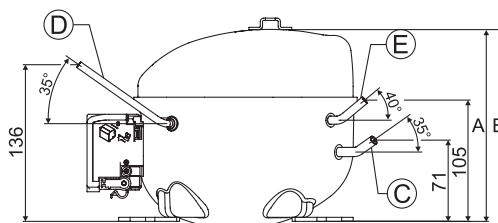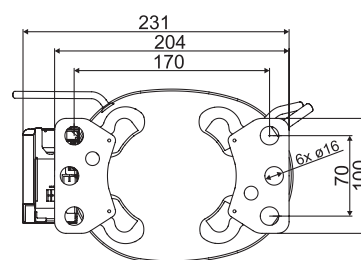

EN 12900 Household



220V, 50Hz, PTC consumption incl., static cooling

Evap. temp. in °C	-45	-40	-35	-30	-25	-23.3	-20	-15	-10	-6.7	-5	0	5	7.2	10	15	20
Capacity in W			54.7	75.6	102	112	133	169	211	241	258						
Power cons. in W			62.1	74.1	86.5	90.7	99.1	112	125	134	139						
Current cons. in A			0.49	0.55	0.61	0.62	0.66	0.72	0.79	0.83	0.85						
COP in W/W			0.88	1.02	1.18	1.23	1.34	1.51	1.68	1.80	1.86						

ASHRAE LBP

220V, 50Hz, PTC consumption incl., static cooling

Evap. temp. in °C	-45	-40	-35	-30	-25	-23.3	-20	-15	-10	-6.7	-5	0	5	7.2	10	15	20
Capacity in W			67.0	92.3	124	136	162	206	257	294	314						
Power cons. in W			62.1	74.1	86.3	90.5	98.7	111	125	133	138						
Current cons. in A			0.49	0.55	0.60	0.62	0.66	0.72	0.78	0.82	0.84						
COP in W/W			1.08	1.25	1.44	1.51	1.64	1.85	2.06	2.20	2.28						

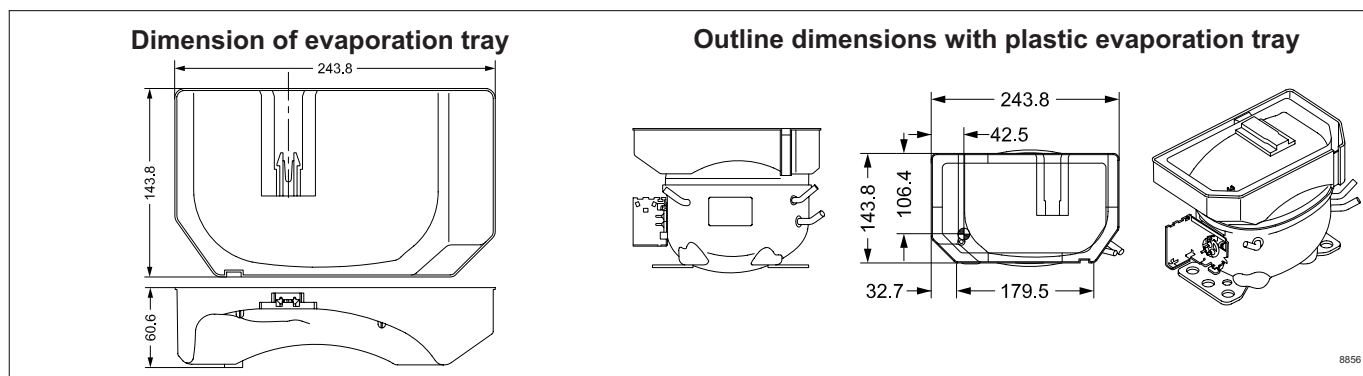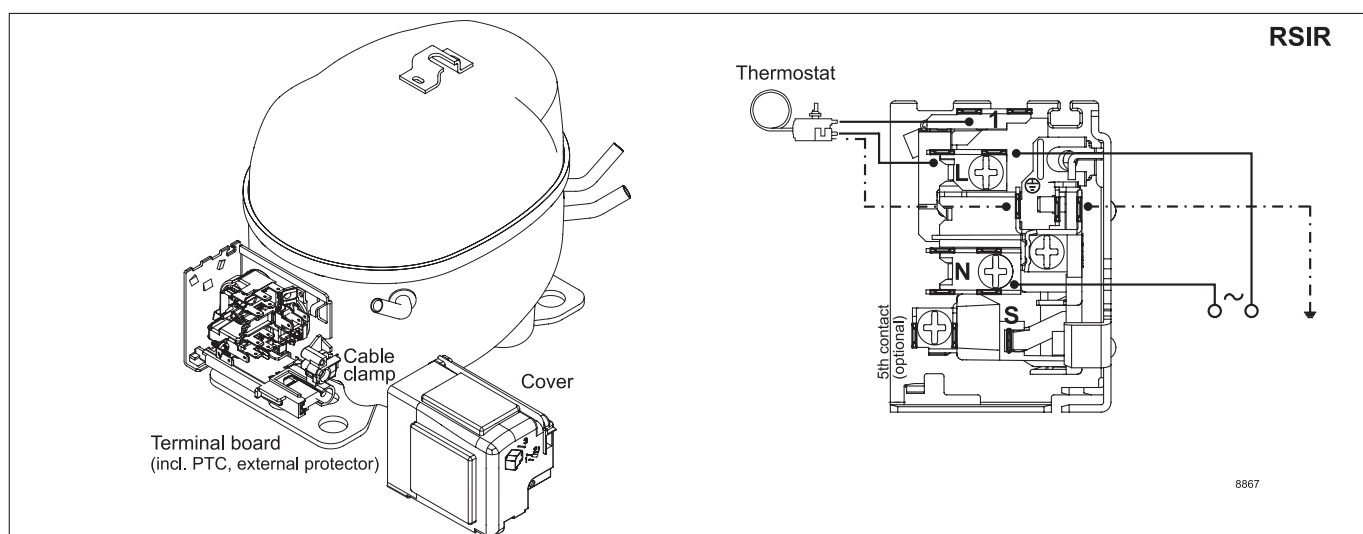

Accessories for	HMK80AA	Code number	Test conditions	EN 12900 Household	ASHRAE LBP
Terminal board	4.8 mm or 6.3 mm spade connectors	ZAF5 / DAF5	Condensing temperature	55°C	54.4°C
(incl. PTC and external protector)			Ambient temperature	32°C	32°C
Motor Protector	AE 18 FU x	F5	Suction gas temperature	32°C	32°C
Cable clamp (screws not included)		113410_	Liquid temperature	no subcooling	32°C
Cover		157595_			
Evaporation tray (optional)		113188_			

All-in-one equipment, e.g. 4ZN	Code number	Mounting accessories	Code number
Cover / cable clamp + screws / earthing screw	16168000	on request, various options available	

Secop can accept no responsibility for possible errors in catalogues, brochures and other printed material. Secop reserves the right to alter its products without notice. This also applies to products already on order provided that such alterations can be made without consequential changes being necessary in specifications already agreed. All trademarks in this material are property of the respective companies. Secop and the Secop logotype are trademarks of Secop GmbH. All rights reserved. www.secop.com