


**EA-130BE8-C05**  
Evaporator  
Technical Specifications

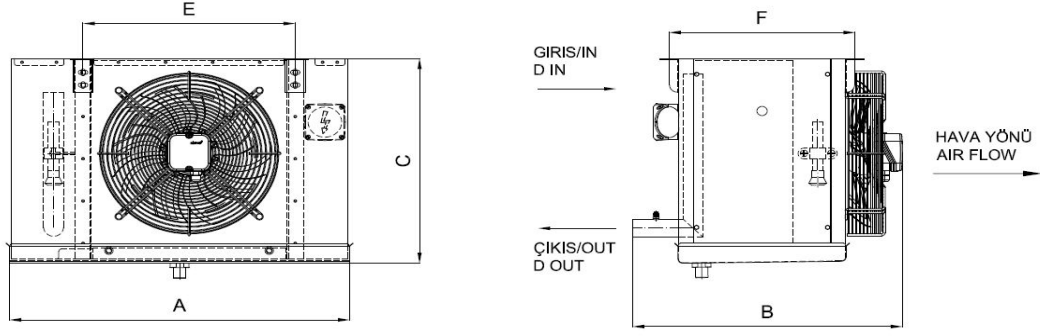

**Dimensions**

A (mm) :	857	B (mm) :	567	C (mm) :	445	F (mm) :	395	E (mm) :	585
#REF! :	Ø9,52	#REF! :	Ø19	W (kg) :	25				

**Capacity Information**

Capacity	1,998.00 Watt	Heat Transfer Surface	11,6 m <sup>2</sup>
Average Room Temperature	-18.00 °C	Tube Volume	4,4 dm <sup>3</sup>
Evaporasyon Sıcaklığı	-25.00 °C	Fin Spacing	8 mm
ΔT	7 K	Test Pressure / Max. Operating Pressure	35 / 25 bar
Refrigerant	R404A	Energy Efficiency Class	E
Altitude	0 m	Air Throw Distance	6.1 m

**Evaporator Fan Data**

Air Flow	1290 m <sup>3</sup> /h	Fan Protection / Isolation Class	IP41 / CLASS B
Number of Fans / Fan Diameter / Fan Cycle	1 / 300 mm / 1300 rpm	Operating Temperature Range	-40/40
Total Fan Power / Current	0.12 kW / 0.87 A	Sound Power Level (LWA)	79 dBA
Fan Voltage / Fan Frequency / Fan Phase	230 Volt / 50 Hz / 1 Ph	Sound Pressure Level (LPA)	57 dBA @ 3 m
fan rankings	1x1		

**Configuration**

**Configuration Name**

**Code**

Cassette Type	RAL 9016 painted Galvanized Sheet	-
Defrost Type	E2 Defrost (Coil + Tray)	3x680+2x680 Watt

**Notes.**

- Capacity correction calculation for altitude is according to related Eurovent Standard.
- Sound pressure calculation standard: EN13487
- Energy Efficiency Class calculation standards: EN328 and Related Eurovent Standard. Standard Conditions: SC2,R404A
- All of the technical information is subject to change without notice.
- All of the performance and technical data according to default configuration.

**Karyer Isı Transfer Sanayi ve Ticaret A.Ş.**

Topçular Mah. Tikveşli Yolu No:8 34140 Topçular - Eyüp / İstanbul Tel: 0 (212) 567 55 09 Pbx  
Faks: 0 (212) 576 23 45  
E-mail: info@karyergroup.com Web: http://www.karyergroup.com/