


## EA-363EE7-C11 Δ

### Evaporator Technical Specifications

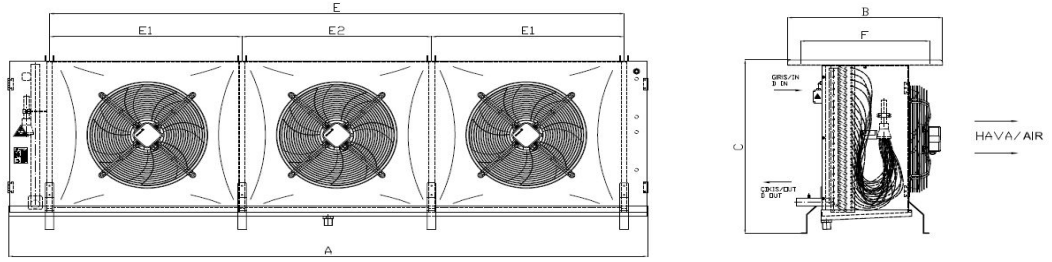

#### Dimensions

A (mm) :	2815	B (mm) :	1000	C (mm) :	1190	F (mm) :	960	E1 (mm) :	818
E2 (mm) :	800	E (mm) :	2435	#REF! :	Ø42	#REF! :	Ø54	W (kg) :	346

#### Capacity Information

Capacity	53,651.00 Watt	Heat Transfer Surface	202,8 m <sup>2</sup>
Average Room Temperature	0.00 °C	Tube Volume	62,3 dm <sup>3</sup>
Evaporasyon Sıcaklığı	-8.00 °C	Fin Spacing	7 mm
ΔT	8 K	Test Pressure / Max. Operating Pressure	35 / 25 bar
Refrigerant	R404A	Energy Efficiency Class	E
Altitude	0 m	Air Throw Distance	41.0 m

#### Evaporator Fan Data

Air Flow	47729 m <sup>3</sup> /h	Fan Protection / Isolation Class	IP54 / CLASS F
Number of Fans / Fan Diameter / Fan Cycle	3 / 630 mm / 1330 rpm	Operating Temperature Range	-40/60
Total Fan Power / Current	7.8 kW / 15 A	Sound Power Level (LWA)	96 dBA
Fan Voltage / Fan Frequency / Fan Phase	400 Volt / 50 Hz / 3 Ph	Sound Pressure Level (LPA)	74 dBA @ 3 m
fan rankings	1x3		

#### Configuration

#### Configuration Name

#### Code

Cassette Type	RAL 9016 painted Galvanized Sheet	-
Defrost Type	E2 Defrost (Coil + Tray)	9x2600+2x2600 Watt

#### Notes.

- Capacity correction calculation for altitude is according to related Eurovent Standard.
- Sound pressure calculation standard: EN13487
- Energy Efficiency Class calculation standards: EN328 and Related Eurovent Standard. Standard Conditions: SC2,R404A
- All of the technical information is subject to change without notice.
- All of the performance and technical data according to default configuration.

#### Karyer Isı Transfer Sanayi ve Ticaret A.Ş.

Topçular Mah. Tikveşli Yolu No:8 34140 Topçular - Eyüp / İstanbul Tel: 0 (212) 567 55 09 Pbx

Faks: 0 (212) 576 23 45

E-mail: info@karyergroup.com Web: <http://www.karyergroup.com/>