


## KT-t-2x250GC1-B04

### Condenser Technical Specifications

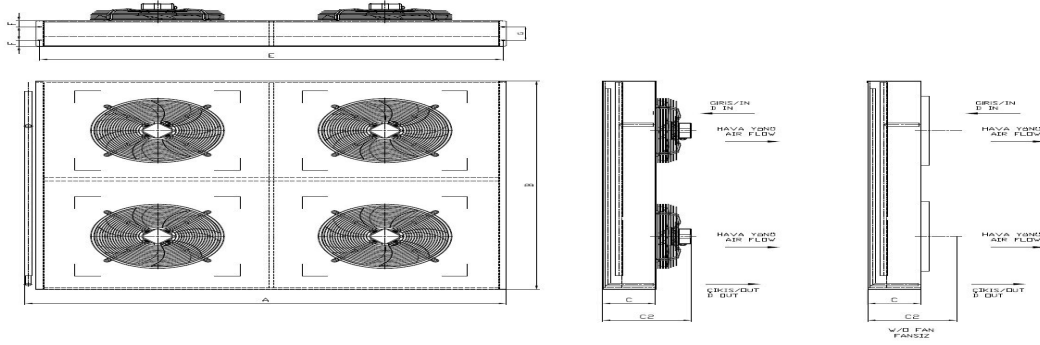

#### Dimensions

A (mm) :	1630	B (mm) :	1320	C (mm) :	250	F (mm) :	40	G (mm) :	170
E (mm) :	1536	C1 (mm) :	290	#REF! :	Ø35	#REF! :	Ø28	C2 (mm) :	390
W (kg) :	146								

#### Capacity Information

Capacity	72,597.00 Watt	Heat Transfer Surface	176,3 m <sup>2</sup>
Ambient Temperature	25.00 °C	Tube Volume	20 dm <sup>3</sup>
Condensation Temperature	40.00 °C	Fin Spacing	2.1 mm
ΔT	15 K	Test Pressure / Max. Operating Pressure	35 /27 bar
Refrigerant	R404A	Energy Efficiency Class	D
Altitude	0 m		

#### Evaporator Fan Data

Air Flow	15323 m <sup>3</sup> /h	Fan Protection / Isolation Class	IP54 / CLASS F
Number of Fans / Fan Diameter / Fan Cycle	4 / 500 mm / 910 rpm	Operating Temperature Range	-25/70
Total Fan Power / Current	1.2 kW / 5.2 A	Sound Power Level (LWA)	75 dBA
Fan Voltage / Fan Frequency / Fan Phase	230 Volt / 50 Hz / 1 Ph	Sound Pressure Level (LPA)	63 dBA @ 1 m
fan rankings	2x2		

Configuration	Configuration Name	Code
Cassette Type	RAL 9016 painted Galvanized Sheet	-

#### Notes.

- Capacity correction calculation for altitude is according to related Eurovent Standard.
- Sound pressure calculation standard: EN13487
- Energy Efficiency Class calculation standards: EN327 and Related Eurovent Standard. Standard Conditions: Tair inlet=25 °C, Tcond.= 40 °C, R404A, P= 1,01325 bar.
- All of the technical information is subject to change without notice.
- All of the performance and technical data according to default configuration.

#### Karyer Isı Transfer Sanayi ve Ticaret A.Ş.

Topçular Mah. Tikveşli Yolu No:8 34140 Topçular - Eyüp / İstanbul Tel: 0 (212) 567 55 09 Pbx  
Faks: 0 (212) 576 23 45  
E-mail: info@karyergroup.com Web: http://www.karyergroup.com/