





PRINCIPAL DIMENSIONS - mm

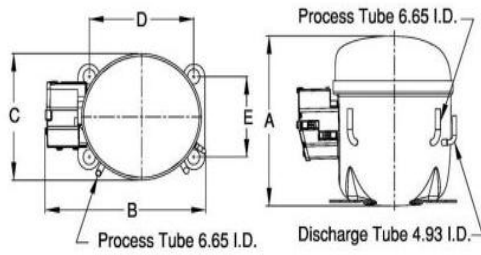


A: 205	B: 250	C: 160	D: 165	E: 102
--------	--------	--------	--------	--------

SCHEMATIC WIRING DIAGRAM C.S.R.

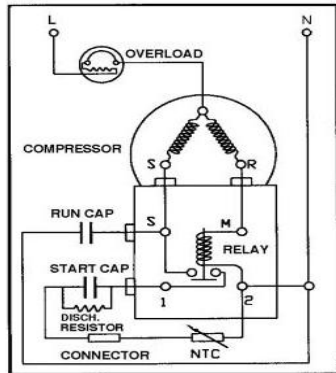

SCHEMATIC WIRING DIAGRAM -

MOUNTING KIT

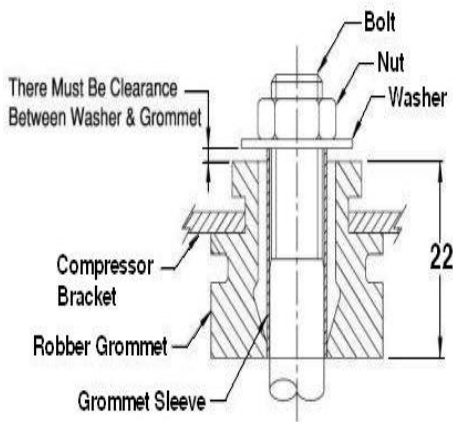

Electrical : 220-240 V/50 Hz. 1 Phase

Nominal Performance

Capacity	756 / - Watts
	2,579 / - BTU/Hr
	650 / - Kcal/Hr
Power Input	495 / - Watts
Locked Rotor Amps	17.00 / - Amps
Max Continuous Current	- / - Amps
Rated Load Amps	2.50 / - Amps
COP	1.53 / - Watts / Watts
EER	5.21 / - BTU/W-Hr

Testing Conditions

Condensing Temperature	54.40 °C	129.9 °F
Evaporating Temperature	-6.70 / - °C	19.9 / - °F
Liquid Temperature	46.10 °C	115.0 °F
Return Gas Temperature	35.00 °C	95.0 °F
Ambient Temperature	35.00 °C	95.0 °F

Application

Evaporating Temp. Range	MBP	@ -23.30 °C to -1.10 °C (-9.9° F to 30.0° F)
	Heat Pump	- °C to - °C (-° F to -° F)
Refrigerant	R404A	
Refrigerant Flow Control	Capillary Tube	
Compressor Cooling	Fan	

Compressor and Motor data

Compressor Type	Reciprocating
Displacement	8.86 cc.
Oil Type	Polyolester Oil
Oil Charge	417 cc.
Motor Type	C.S.R. ; 2 Pole 2,850 / - r/m
Voltage Range	187-264/- Volts 50/- Hz.
Winding Resistance at 25 °C	
Start	17.74 Ohms
Run	4.18 Ohms
Weight with Oil	11.60 Kg.
Weight with Oil and Accessories	12.00 Kg.

Electrical Components

Motor Protector	
Type	External 3/4"
Model Number	KME664-33/C
Open / Close	105-115 / 70-52 °C
1st Cycle trip at 25 °C	19.50 Amps(main) - Amps(start)
Motor Starter	
Type	Current Relay
Model Number	KME682-8N
Pick Up (max.)	8.00 Amps
Drop Out (min.)	7.00 Amps
Terminal Cover	KEA 099
Start Capacitor	43-52 µF 330 VAC.
Disch Resistor for Start Cap	39000 Ohms 2 W
Run Capacitor	8 µF 450 VAC.

Mounting Kit

Rubber Grommet	4007KMD905-3
Sleeve Grommet	3KMD903-2-Z
Washer	4023KEB387

Since we are constantly improving our product , the specification are subject to change without notice.

REV. DATE
30-06-15

C / N No.
0277/15

Certificate Marks

