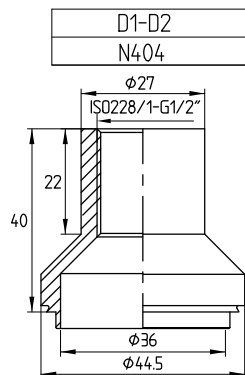




ID	Drawing No.	DESCRIPTION	A
1	2305335-01	HBL95A-50(N404-D1-D2,H2116-D3,H4152-D4,W520-H1-H2)	126
2	2305335-02	HBL95A-60(N404-D1-D2,H2116-D3,H4152-D4,W520-H1-H2)	149
3	2305335-03	HBL95A-70(N404-D1-D2,H2116-D3,H4152-D4,W520-H1-H2)	172
4	2305335-04	HBL95A-90(N404-D1-D2,H2116-D3,H4152-D4,W520-H1-H2)	218
5	2305335-05	HBL95A-110(N404-D1-D2,H2116-D3,H4152-D4,W520-H1-H2)	264
6	2305335-06	HBL95A-130(N404-D1-D2,H2116-D3,H4152-D4,W520-H1-H2)	311



备注：加底脚

		DESIGN DATA				
DESIGN PRESSURE		4.5MPa				
TEST PRESSURE		6.75MPa				
DESIGN TEMPERATURE		-196/+225				
LEAKAGE TEST		He检				
PLATE MATERIAL		316L				
PIPE MATERIAL		304				
FRAME MATERIAL		304				
Assembly drawing	DEPARTMENT	Sales Department	DATE	SCALE	 BAODE HEAT EXCHANGER 宝得换热	
	DESIGNER	JLN	2022/04/27			
	INSPECTOR	ZJF		MODEL		HBL95A
	APPROVAL	FL		DRAWING NO.		2305335

修改号	修改日期	修改内容	修改人员