


YZF00 罩极电机 Shaded Pole Motors



使用说明:

工作方式: S1
防护等级: IP42
绝缘等级: B级
环境温度: -30℃ ~ 50℃

TYPE 型号	VOLTAGE 额定电压 V	FREQUENCY 额定频率 Hz	RATED INPUT 额定功率 W	OUT PUT 输出功率 W	RATED CURRENT 额定电流 A	RATED SPEED 额定转速 r/min	AIR VOLUME 额定风量 m³/h	FAN BLADE 风叶型号 mm	NET WEIGHT 净重 kg	A	B	C	D	LICENSE 证书
YZF2-13-00	220-240	50/60	20	2	0.14	1300	205	Φ172	0.8	13	12	-	78	CE VDE CCC
YZF5-13-00	220-240	50/60	29	5	0.20	1300	455	Φ200	0.8	13	12	-	78	CE VDE CCC
YZF6-13-00	110-120	60	33	6	0.55	1550	510	Φ200	0.8	13	12	-	78	UL
YZF7-20-00	220-240	50/60	31	7	0.23	1300	640	Φ230	1.1	19	12.5	-	84.5	CE VDE CCC
YZF10-20-00	220-240	50/60	36	10	0.25	1300	650	Φ230	1.1	19	12.5	-	84.5	CE VDE CCC
	110-120	60	55	10	0.80	1550	800	Φ230	1.1	19	12.5	-	84.5	UL
YZF12-20-00	220-240	50/60	54	12	0.36	1300	690	Φ230	1.1	19	12.5	-	84.5	CE VDE CCC
YZF16-25-00	220-240	50/60	60	16	0.45	1300	760	Φ254	1.4	25	14	-	92	CE VDE CCC
YZF18-25-00	110-120	60	70	18	1.01	1550	940	Φ254	1.4	25	14	-	92	UL
YZF18-30-00	220-240	50/60	70	18	0.50	1300	1000	Φ254	1.5	30	17.5	-	100.5	CE VDE CCC
	110-120	60	75	18	1.10	1450	1000	Φ254	1.5	30	17.5	-	100.5	UL
YZF25-40-00	220-240	50/60	90	25	0.70	1300	1030	Φ300	1.8	40	18.5	-	111.5	CE VDE CCC
	110-120	60	100	25	1.40	1450	1030	Φ300	1.8	40	18.5	-	111.5	UL
YZF34-45-00	220-240	50/60	110	34	0.85	1300	1210	Φ300	2.0	45	22.5	-	120.5	CE VDE CCC
	110-120	60	110	34	1.50	1450	1210	Φ300	2.0	45	22.5	-	120.5	UL

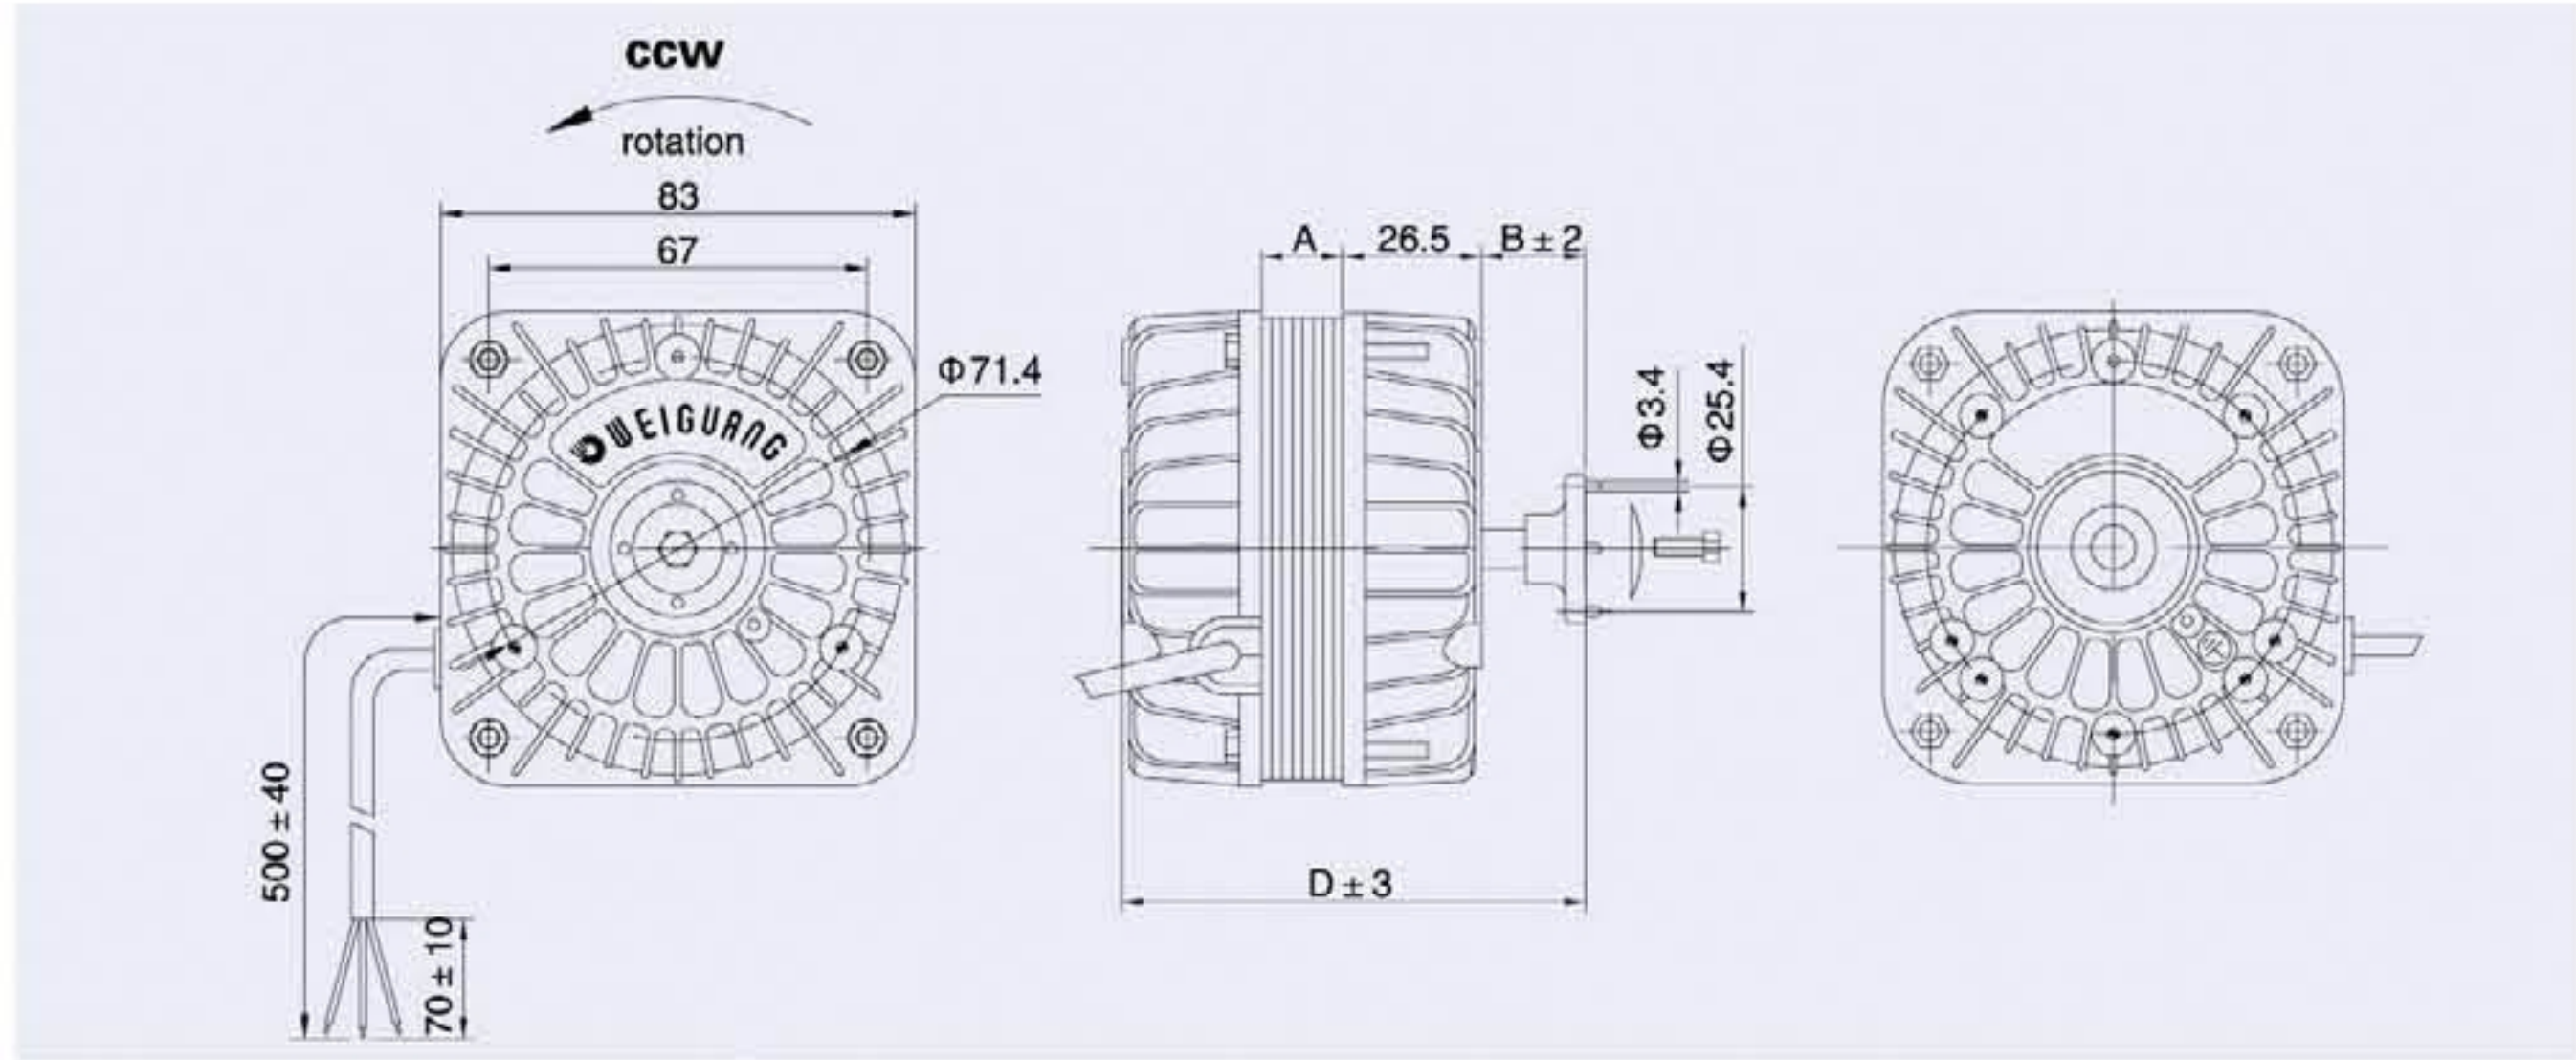


YZF18 罩极电机 Shaded Pole Motors



使用说明:

工作方式: S1
防护等级: IP42
绝缘等级: B级
环境温度: -30℃ ~ 50℃

TYPE 型号	VOLTAGE 额定电压 V	FREQUENCY 额定频率 Hz	RATED INPUT 额定功率 W	OUT PUT 输出功率 W	RATED CURRENT 额定电流 A	RATED SPEED 额定转速 r/min	AIR VOLUME 额定风量 m³/h	FAN BLADE 风叶型号 mm	NET WEIGHT 净重 kg	A	B	C	D	LICENSE 证书
YZF2-13-18	220-240	50/60	20	2	0.14	1300	205	Φ172	0.8	13	13.5	43	78	CE VDE CCC
YZF5-13-18	220-240	50/60	29	5	0.20	1300	455	Φ200	0.8	13	13.5	43	78	CE VDE CCC
YZF6-13-18	110-120	60	33	6	0.55	1550	510	Φ200	0.8	13	13.5	43	78	UL
YZF7-20-18	220-240	50/60	31	7	0.23	1300	640	Φ230	1.1	19	14	43.5	84.5	CE VDE CCC
YZF10-20-18	220-240	50/60	36	10	0.25	1300	650	Φ230	1.1	19	14	43.5	84.5	CE VDE CCC
	110-120	60	55	10	0.80	1550	800	Φ230	1.1	19	14	43.5	84.5	UL
YZF12-20-18	220-240	50/60	54	12	0.36	1300	690	Φ230	1.1	19	14	43.5	84.5	CE VDE CCC
YZF16-25-18	220-240	50/60	60	16	0.45	1300	760	Φ254	1.4	25	15.5	45	92	CE VDE CCC
YZF18-25-18	110-120	60	70	18	1.01	1550	940	Φ254	1.4	25	15.5	45	92	UL

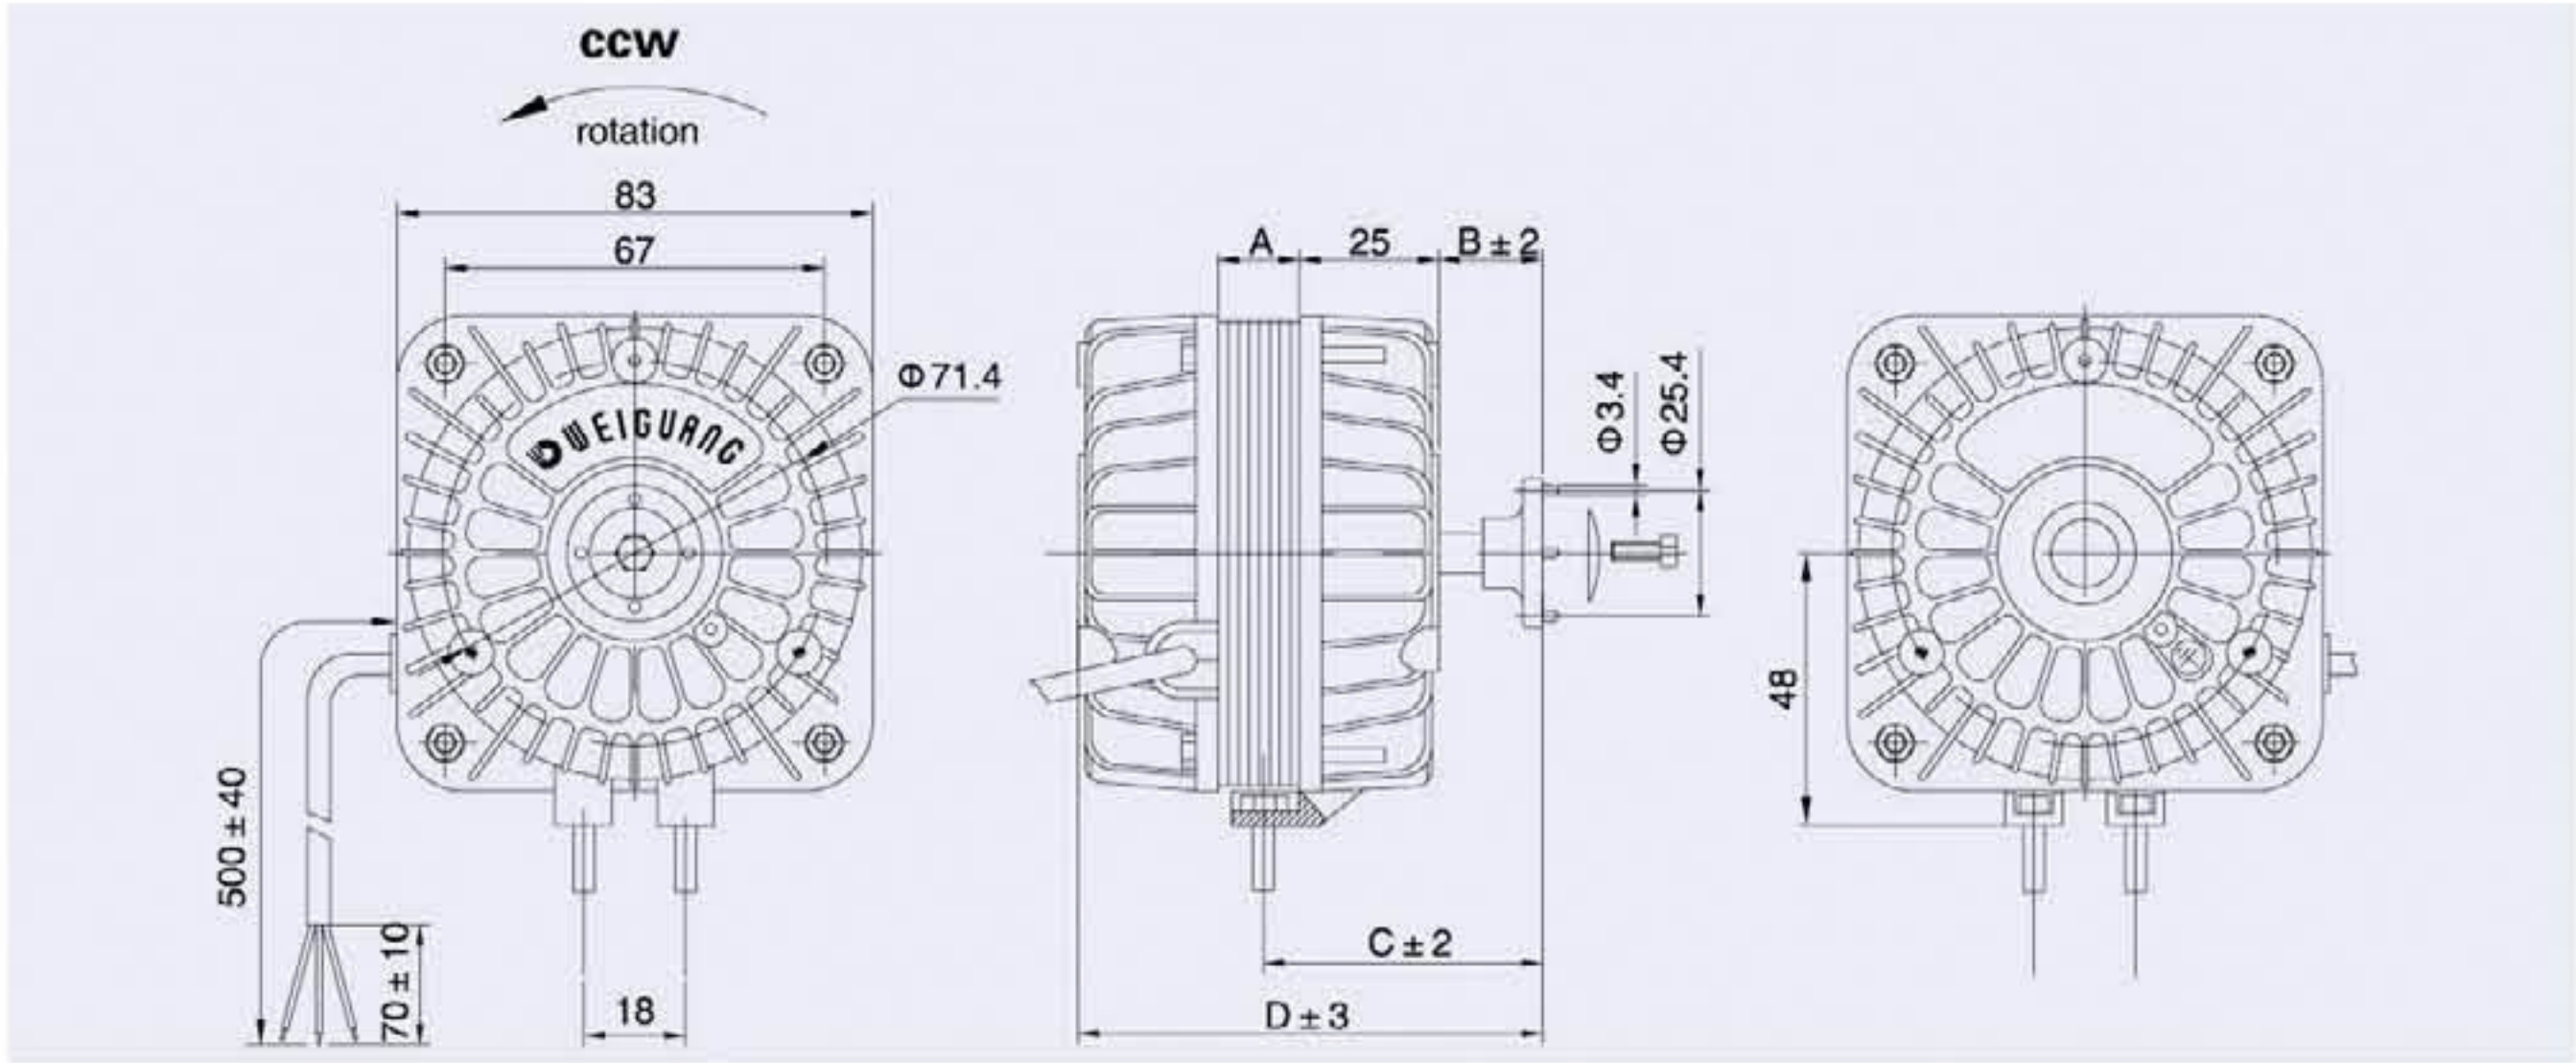


YZF26 罩极电机 Shaded Pole Motors



使用说明:

工作方式: S1
防护等级: IP42
绝缘等级: B级
环境温度: -30℃ ~ 50℃

TYPE 型号	VOLTAGE 额定电压 V	FREQUENCY 频率 Hz	RATED INPUT 额定功率 W	OUT PUT 输出功率 W	RATED CURRENT 额定电流 A	RATED SPEED 额定转速 r/min	AIR VOLUME 额定风量 m³/h	FAN BLADE 风叶型号 mm	NET WEIGHT 净重 kg	A	B	C	D	E	LICENSE 证书
YZF2-13-26	220-240	50/60	20	2	0.14	1300	205	Φ172	0.8	13	13.5	43	78	-	CE VDE CCC
YZF5-13-26	220-240	50/60	29	5	0.20	1300	455	Φ200	0.8	13	13.5	43	78	-	CE VDE CCC
YZF6-13-26	110-120	60	33	6	0.55	1550	510	Φ200	0.8	13	13.5	43	78	-	UL
YZF7-20-26	220-240	50/60	31	7	0.23	1300	640	Φ230	1.1	19	14	43.5	84.5	-	CE VDE CCC
YZF10-20-26	220-240	50/60	36	10	0.25	1300	650	Φ230	1.1	19	14	43.5	84.5	-	CE VDE CCC
	110-120	60	55	10	0.80	1550	800								UL
YZF12-20-26	220-240	50/60	54	12	0.36	1300	690	Φ230	1.1	19	14	43.5	84.5	-	CE VDE CCC
YZF16-25-26	220-240	50/60	60	16	0.45	1300	760	Φ254	1.4	25	15.5	45	92	-	CE VDE CCC
YZF18-25-26	110-120	60	70	18	1.01	1550	940								UL
YZF18-30-26	220-240	50/60	70	18	0.50	1300	1000	Φ254	1.5	30	17.5	48.5	100.5	21	CE VDE CCC
	110-120	60	75	18	1.10	1450									CE VDE CCC
YZF25-40-26	220-240	50/60	90	25	0.70	1300	1030	Φ300	1.8	40	18.5	49.5	111.5	31	CE VDE CCC
	110-120	60	100	25	1.40	1450									CE VDE CCC
YZF34-45-26	220-240	50/60	110	34	0.85	1300	1210	Φ300	2.0	45	22.5	53.5	120.5	36	CE VDE CCC
	110-120	60	110	34	1.50	1450									CE VDE CCC

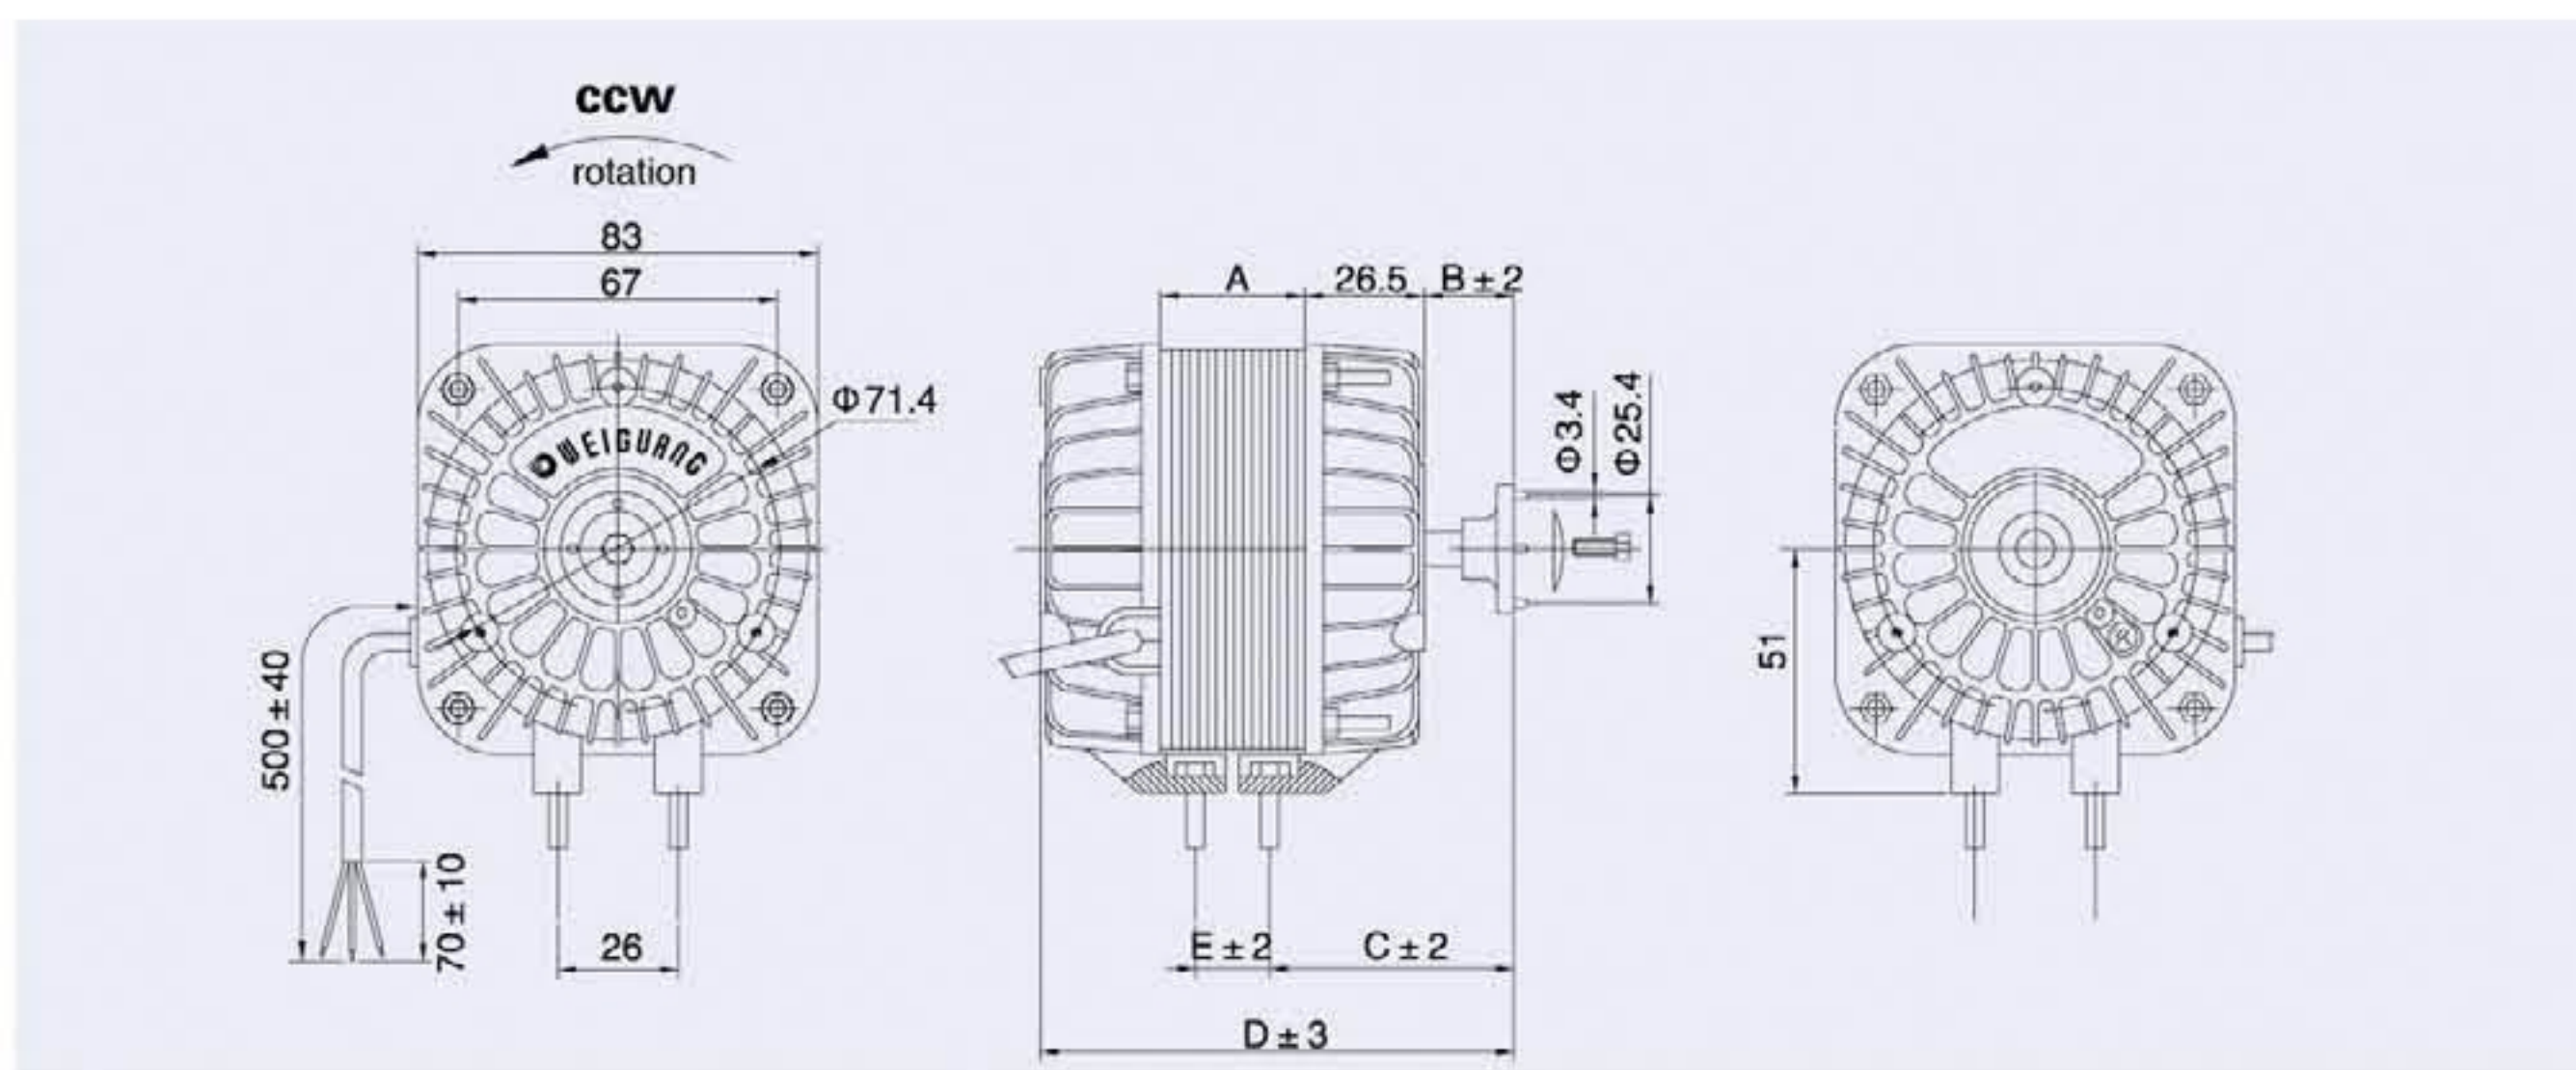


YZF18/26 罩极电机 Shaded Pole Motors



使用说明:

工作方式: S1
防护等级: IP42
绝缘等级: B级
环境温度: -30℃ ~ 50℃

TYPE 型号	VOLTAGE 额定电压 V	FREQUENCY 频率 Hz	RATED INPUT 额定功率 W	OUT PUT 输出功率 W	RATED CURRENT 额定电流 A	RATED SPEED 额定转速 r/min	AIR VOLUME 额定风量 m³/h	FAN BLADE 风叶型号 mm	NET WEIGHT 净重 kg	A	B	C	D	E	LICENSE 证书
YZF2-13-18/26	220-240	50/60	20	2	0.14	1300	205	Φ172	0.8	13	15	46	83	45	CE VDE CCC
YZF5-13-18/26	220-240	50/60	29	5	0.20	1300	455	Φ200	0.8	13	15	46	83	45	CE VDE CCC
YZF6-13-18/26	110-120	60	33	6	0.55	1550	510	Φ200	0.8	13	15	46	83	45	UL
YZF7-20-18/26	220-240	50/60	31	7	0.23	1300	640	Φ230	1.1	19	15	46	89	51	CE VDE CCC
YZF10-20-18/26	220-240	50/60	36	10	0.25	1300	650	Φ230	1.1	19	15	46	89	51	CE VDE CCC
	110-120	60	55	10	0.80	1550	800								UL
YZF12-20-18/26	220-240	50/60	54	12	0.36	1300	690	Φ230	1.1	19	15	46	89	51	CE VDE CCC
YZF16-25-18/26	220-240	50/60	60	16	0.45	1300	760	Φ254	1.4	25	14	45	94	56	CE VDE CCC
YZF18-25-18/26	110-120	60	70	18	1.01	1550	940								UL
YZF18-30-18/26	220-240	50/60	70	18	0.50	1300	1000	Φ254	1.5	30	17.5	48.5	102.5	64.5	CE VDE CCC
	110-120	60	75	18	1.10	1450									CE VDE CCC
YZF25-40-18/26	220-240	50/60	90	25	0.70	1300	1030	Φ300	1.8	40	18.5	49.5	113.5	75.5	CE VDE CCC
	110-120	60	100	25	1.40	1450									CE VDE CCC
YZF34-45-18/26	220-240	50/60	110	34	0.85	1300	1210	Φ300	2.0	45	22.5	53.5	122.5	84.5	CE VDE CCC
	110-120	60	110	34	1.50	1450									CE VDE CCC

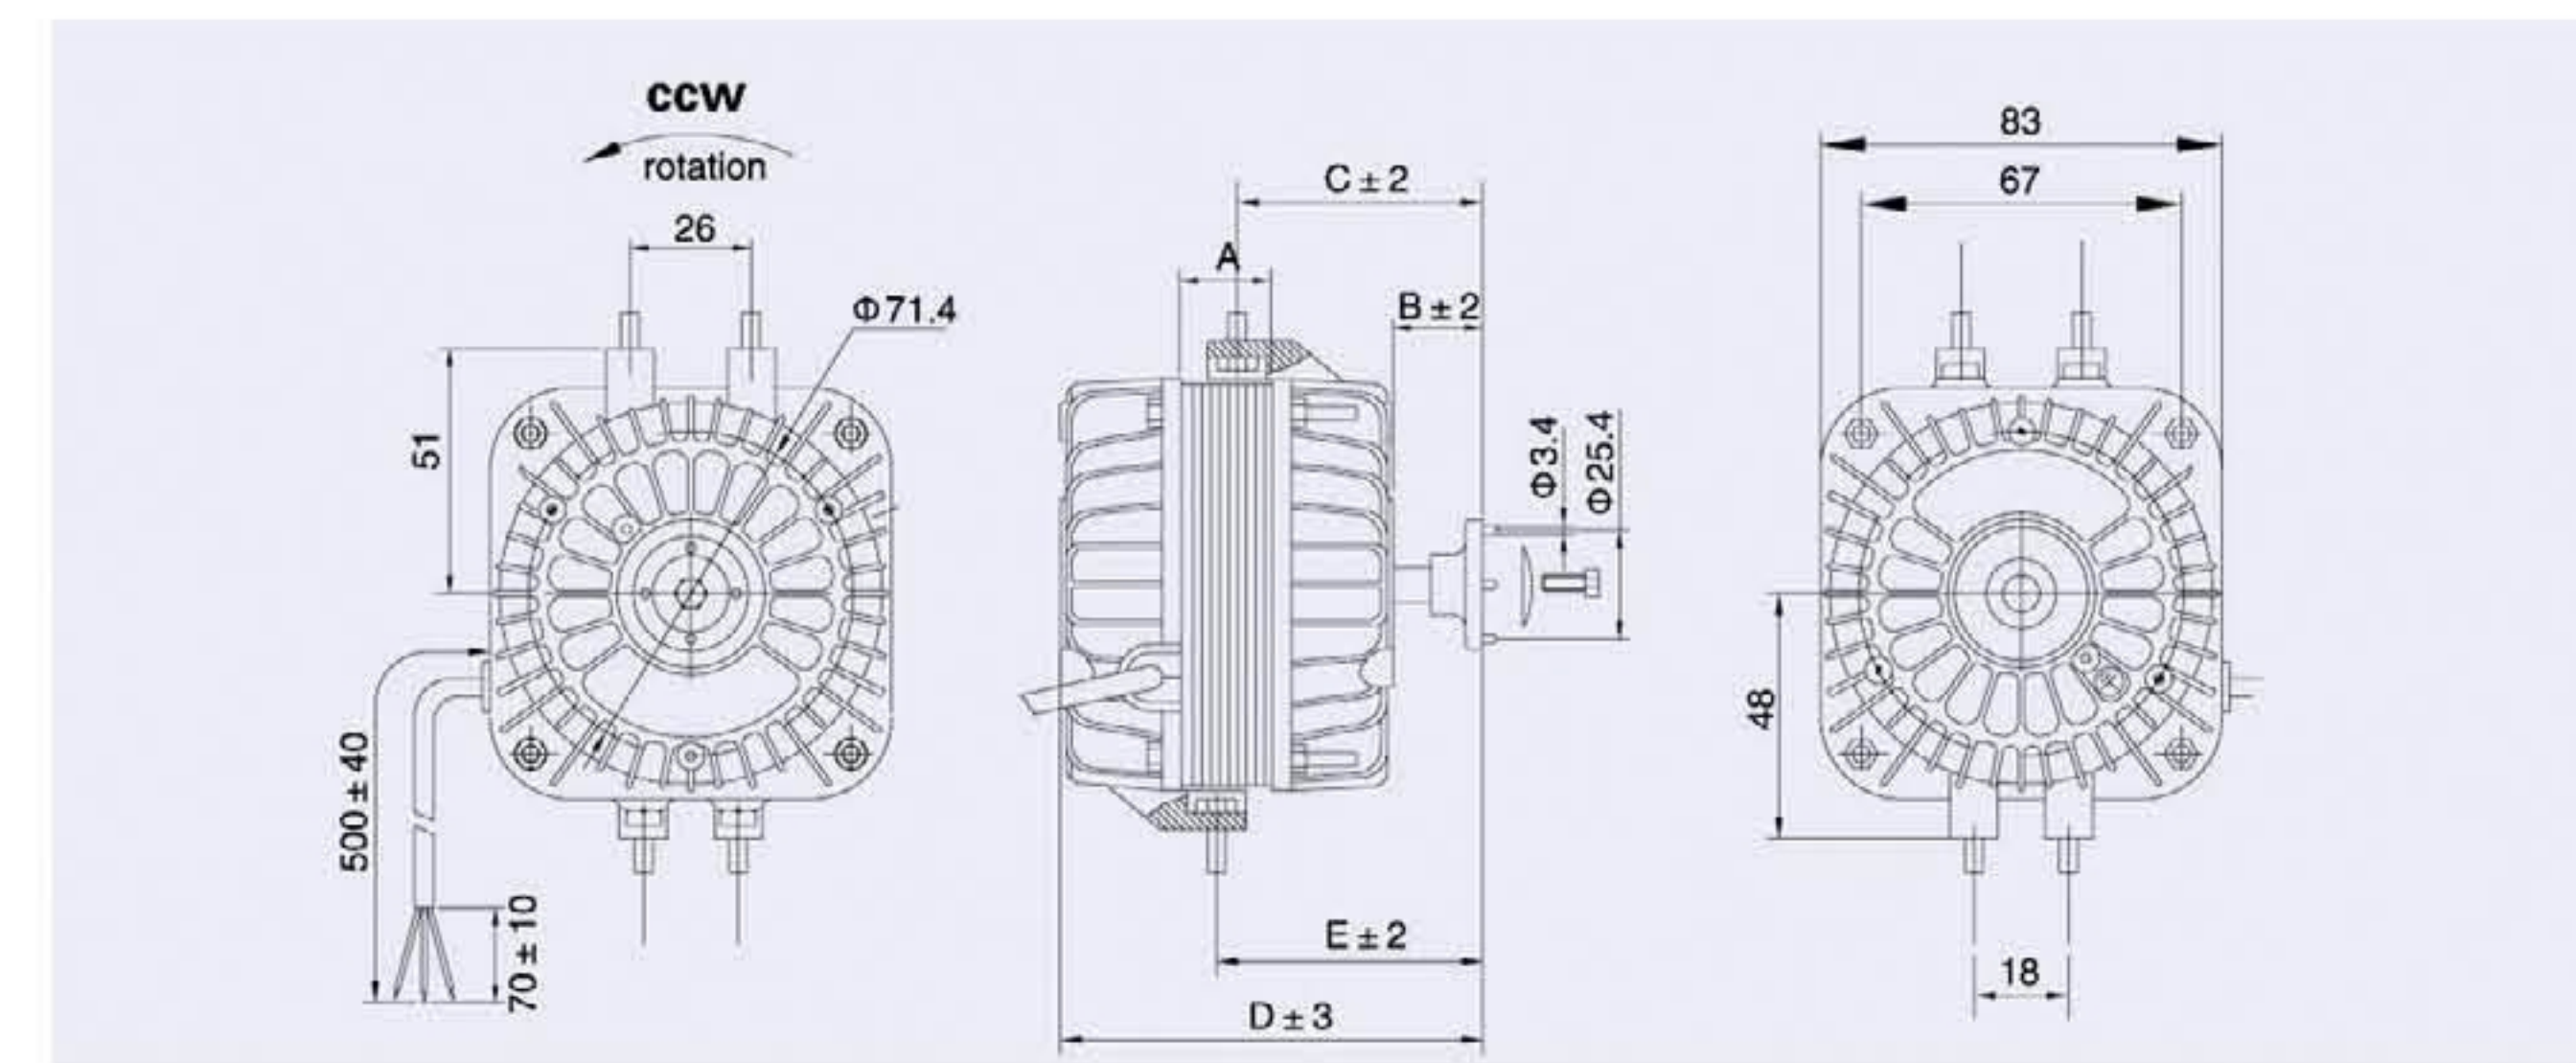


YZF 带端子电机 With Pin Terminal Motors




使用说明:

工作方式: S1
绝缘等级: B级
环境温度: -30℃ ~ 50℃

TYPE 型号	VOLTAGE 额定电压 V	FREQUENCY 频率 Hz	RATED INPUT 额定功率 W	OUTPUT 输出功率 W	RATED CURRENT 额定电流 A	RATED SPEED 额定转速 r/min	AIR VOLUME 额定风量 m³/h	FAN BLADE 风叶型号 mm	NET WEIGHT 净重 kg	A	B	C	D	LICENSE 证书
YZF2-13-P	220-240	50/60	20	2	0.14	1300	205	Φ172	0.8	13	12	43	78	CE VDE
YZF5-13-P	220-240	50/60	29	5	0.20	1300	455	Φ200	0.8	13	12	43	78	CE VDE
YZF7-20-P	220-240	50/60	31	7	0.23	1300	640	Φ230	1.1	19	12.5	43.5	84.5	CE VDE
YZF10-20-P	220-240	50/60	36	10	0.25	1300	650	Φ230	1.1	19	12.5	43.5	84.5	CE VDE
YZF12-20-P	220-240	50/60	54	12	0.36	1300	690	Φ230	1.1	19	12.5	43.5	84.5	CE VDE
YZF16-25-P	220-240	50/60	60	16	0.45	1300	760	Φ254	1.4	25	14	45	82	CE VDE
YZF18-30-P	220-240	50/60	70	18	0.50	1300	1000	Φ254	1.5	30	17.5	48.5	100.5	CE VDE
YZF25-40-P	220-240	50/60	90	25	0.70	1300	1030	Φ300	1.8	40	18.5	48.5	111.5	CE VDE
YZF34-45-P	220-240	50/60	110	34	0.85	1300	1210	Φ300	2.0	45	22.5	53.5	120.5	CE VDE

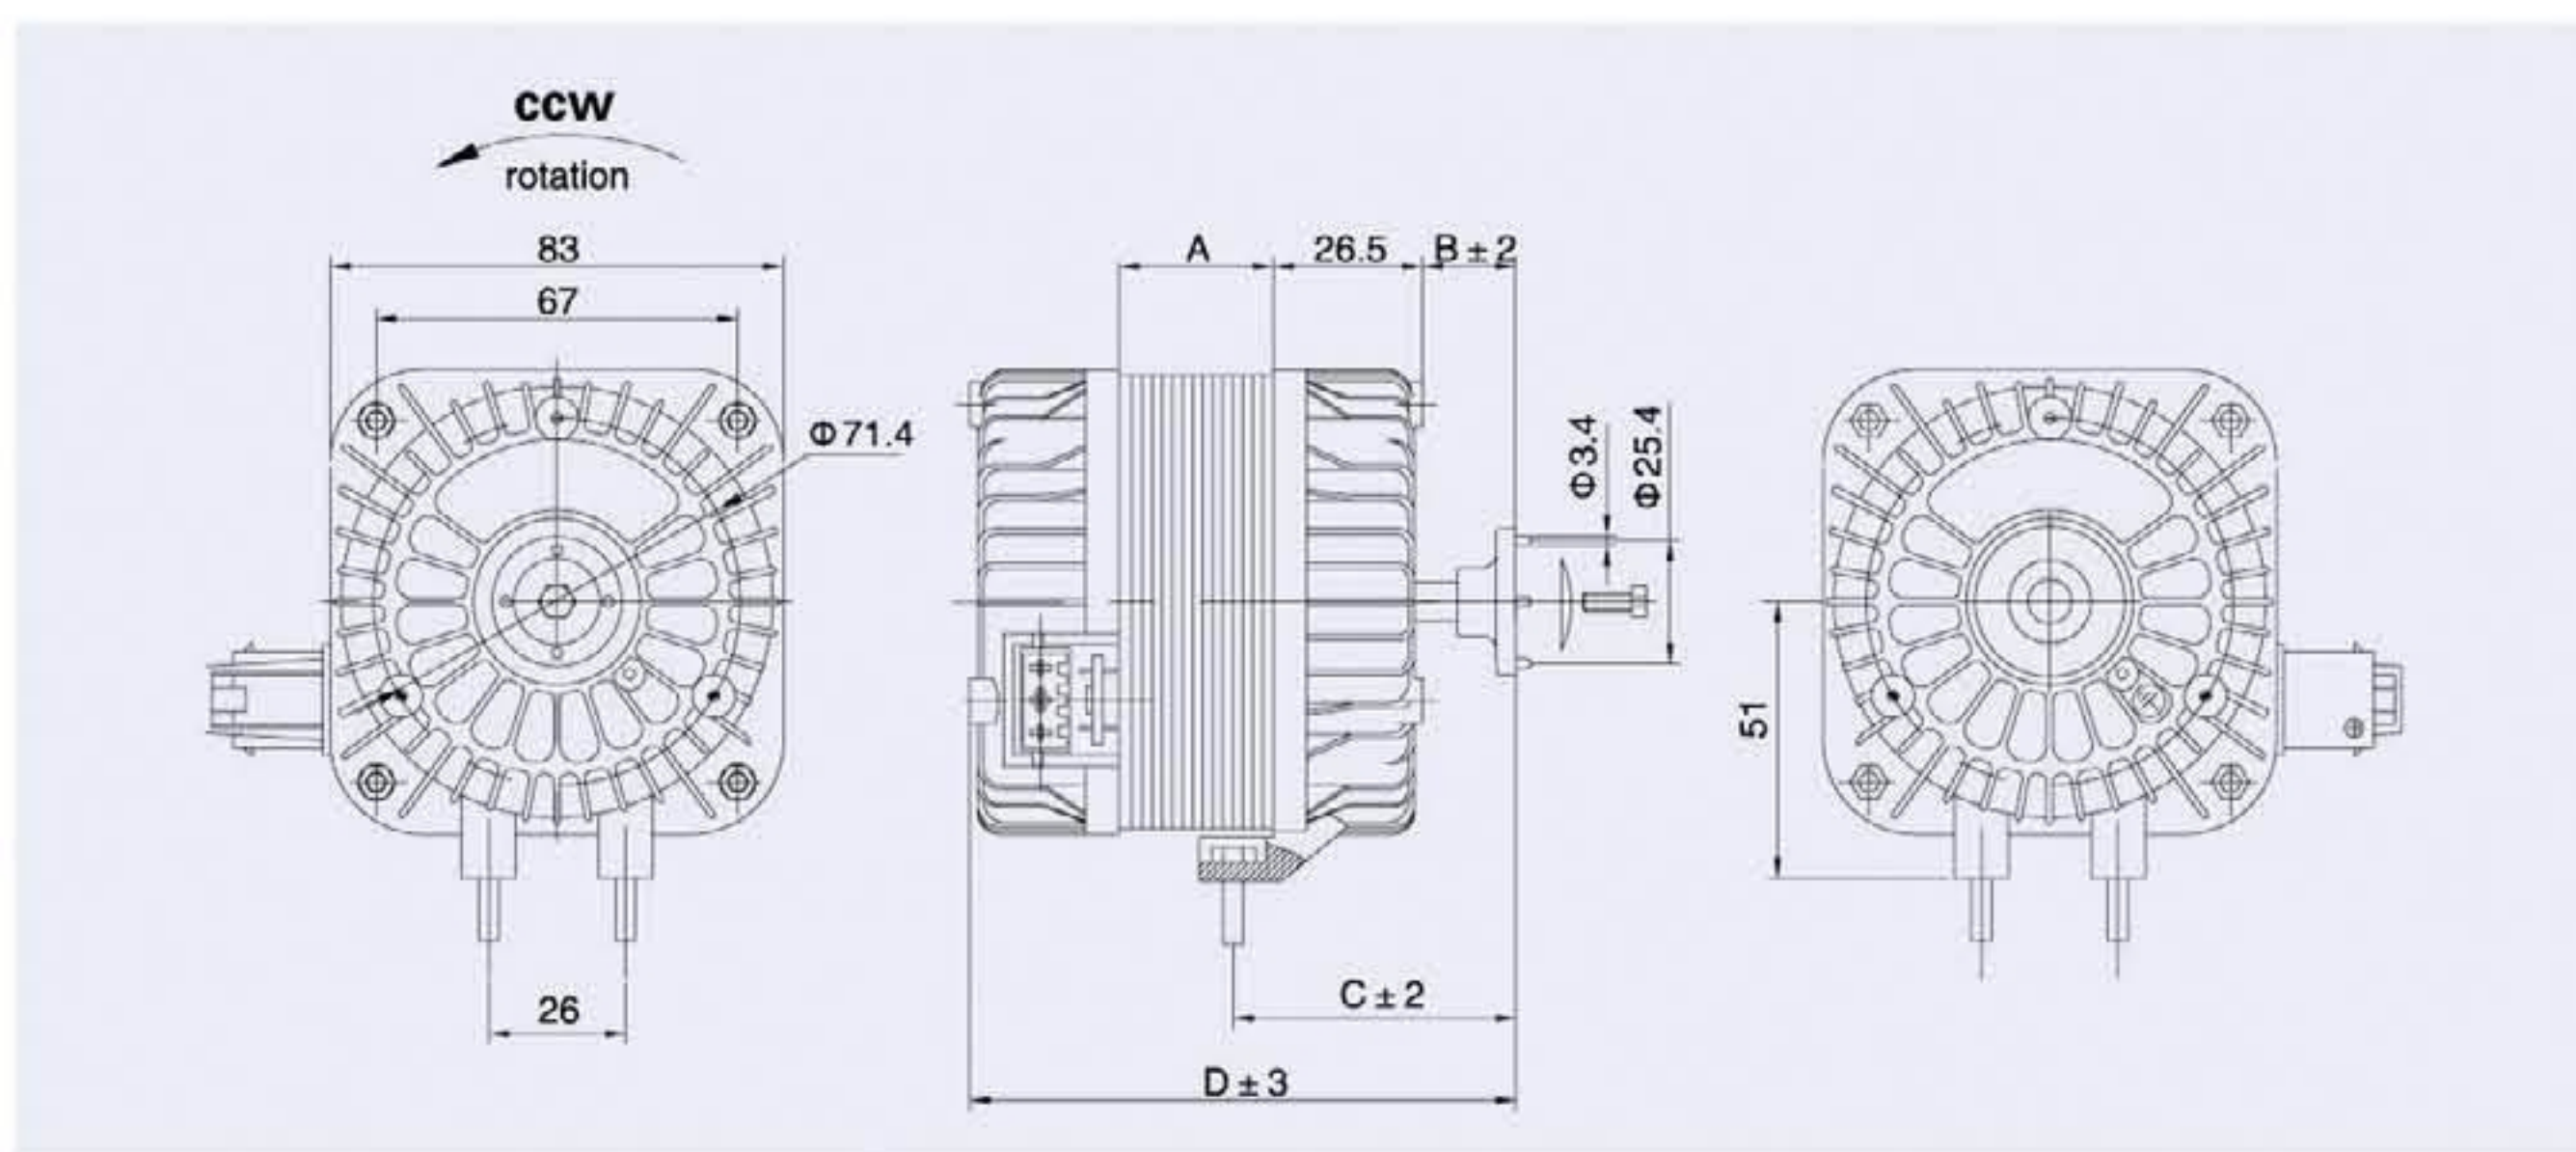


YCF 电容电机 Capacitance Motors

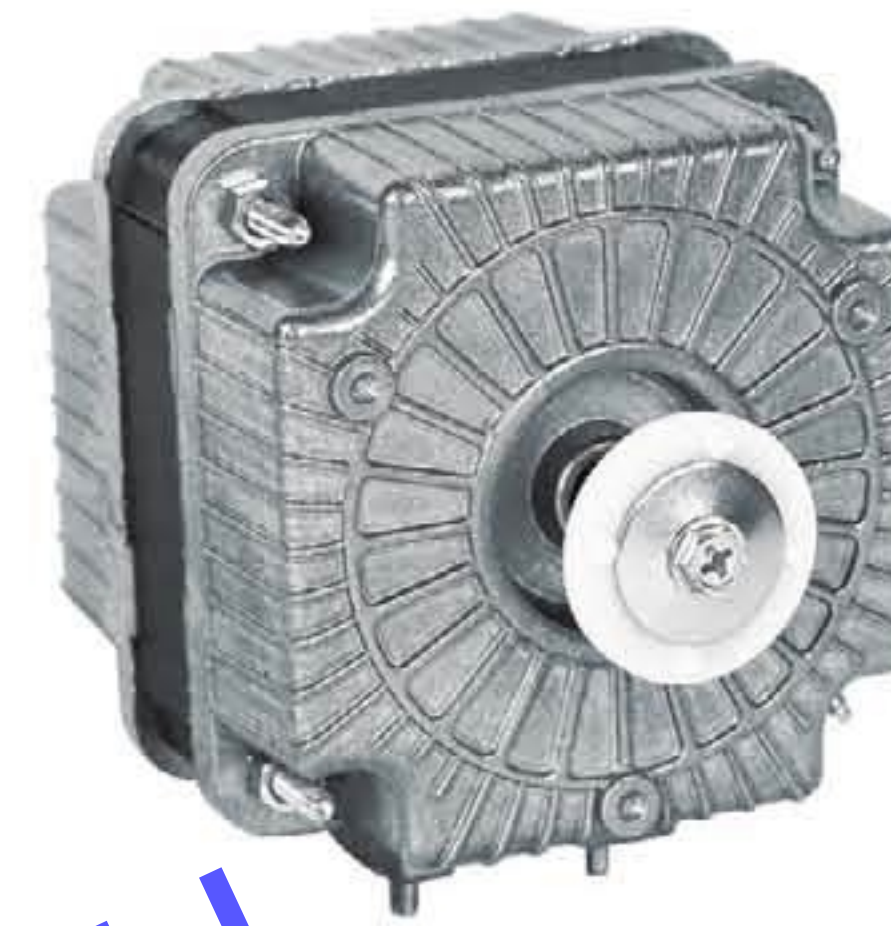


使用说明:

工作方式: S1
防护等级: IP42
绝缘等级: B级
环境温度: -30℃ ~ 50℃

TYPE 型号	VOLTAGE 额定电压 V	FREQUENCY 频率 Hz	RATED INPUT 额定功率 W	OUT PUT 输出功率 W	RATED CURRENT 额定电流 A	RATED SPEED 额定转速 r/min	AIR VOLUME 额定风量 m³/h	CAPACITANCE 电容型号 μF	FAN BLADE 风叶型号 mm	NET WEIGHT 净重 kg	A	B	C	D
YCF10-13-4	230	50	40	15	0.20	1300	900	1	Φ230	0.8	13	12	43	78
YCF20-20-2	230	50	55	20	0.28	2500	650	2	Φ200	1.2	20	17	52.5	99
YCF20-20-4	230	50	50	20	0.25	1300	1000	1.5	Φ254	1.2	20	17	52.5	99
YCF40-25-2	230	50	110	40	0.50	2500	750	3	Φ230	1.4	25	17	52.5	104
YCF30-30-2	230	50	100	30	0.50	2500	880	3	Φ250	1.6	30	17	52.5	109
YCF30-30-4	230	50	75	30	0.35	1300	1400	2	Φ300	1.6	30	17	52.5	109
YCF80-50-2	230	50	180	80	0.70	2500	1600	5	Φ254	2.5	50	15	50.5	127
YCF60-50-4	230	50	120	60	0.55	1300	2200	3	Φ350	2.5	50	28	63.5	140

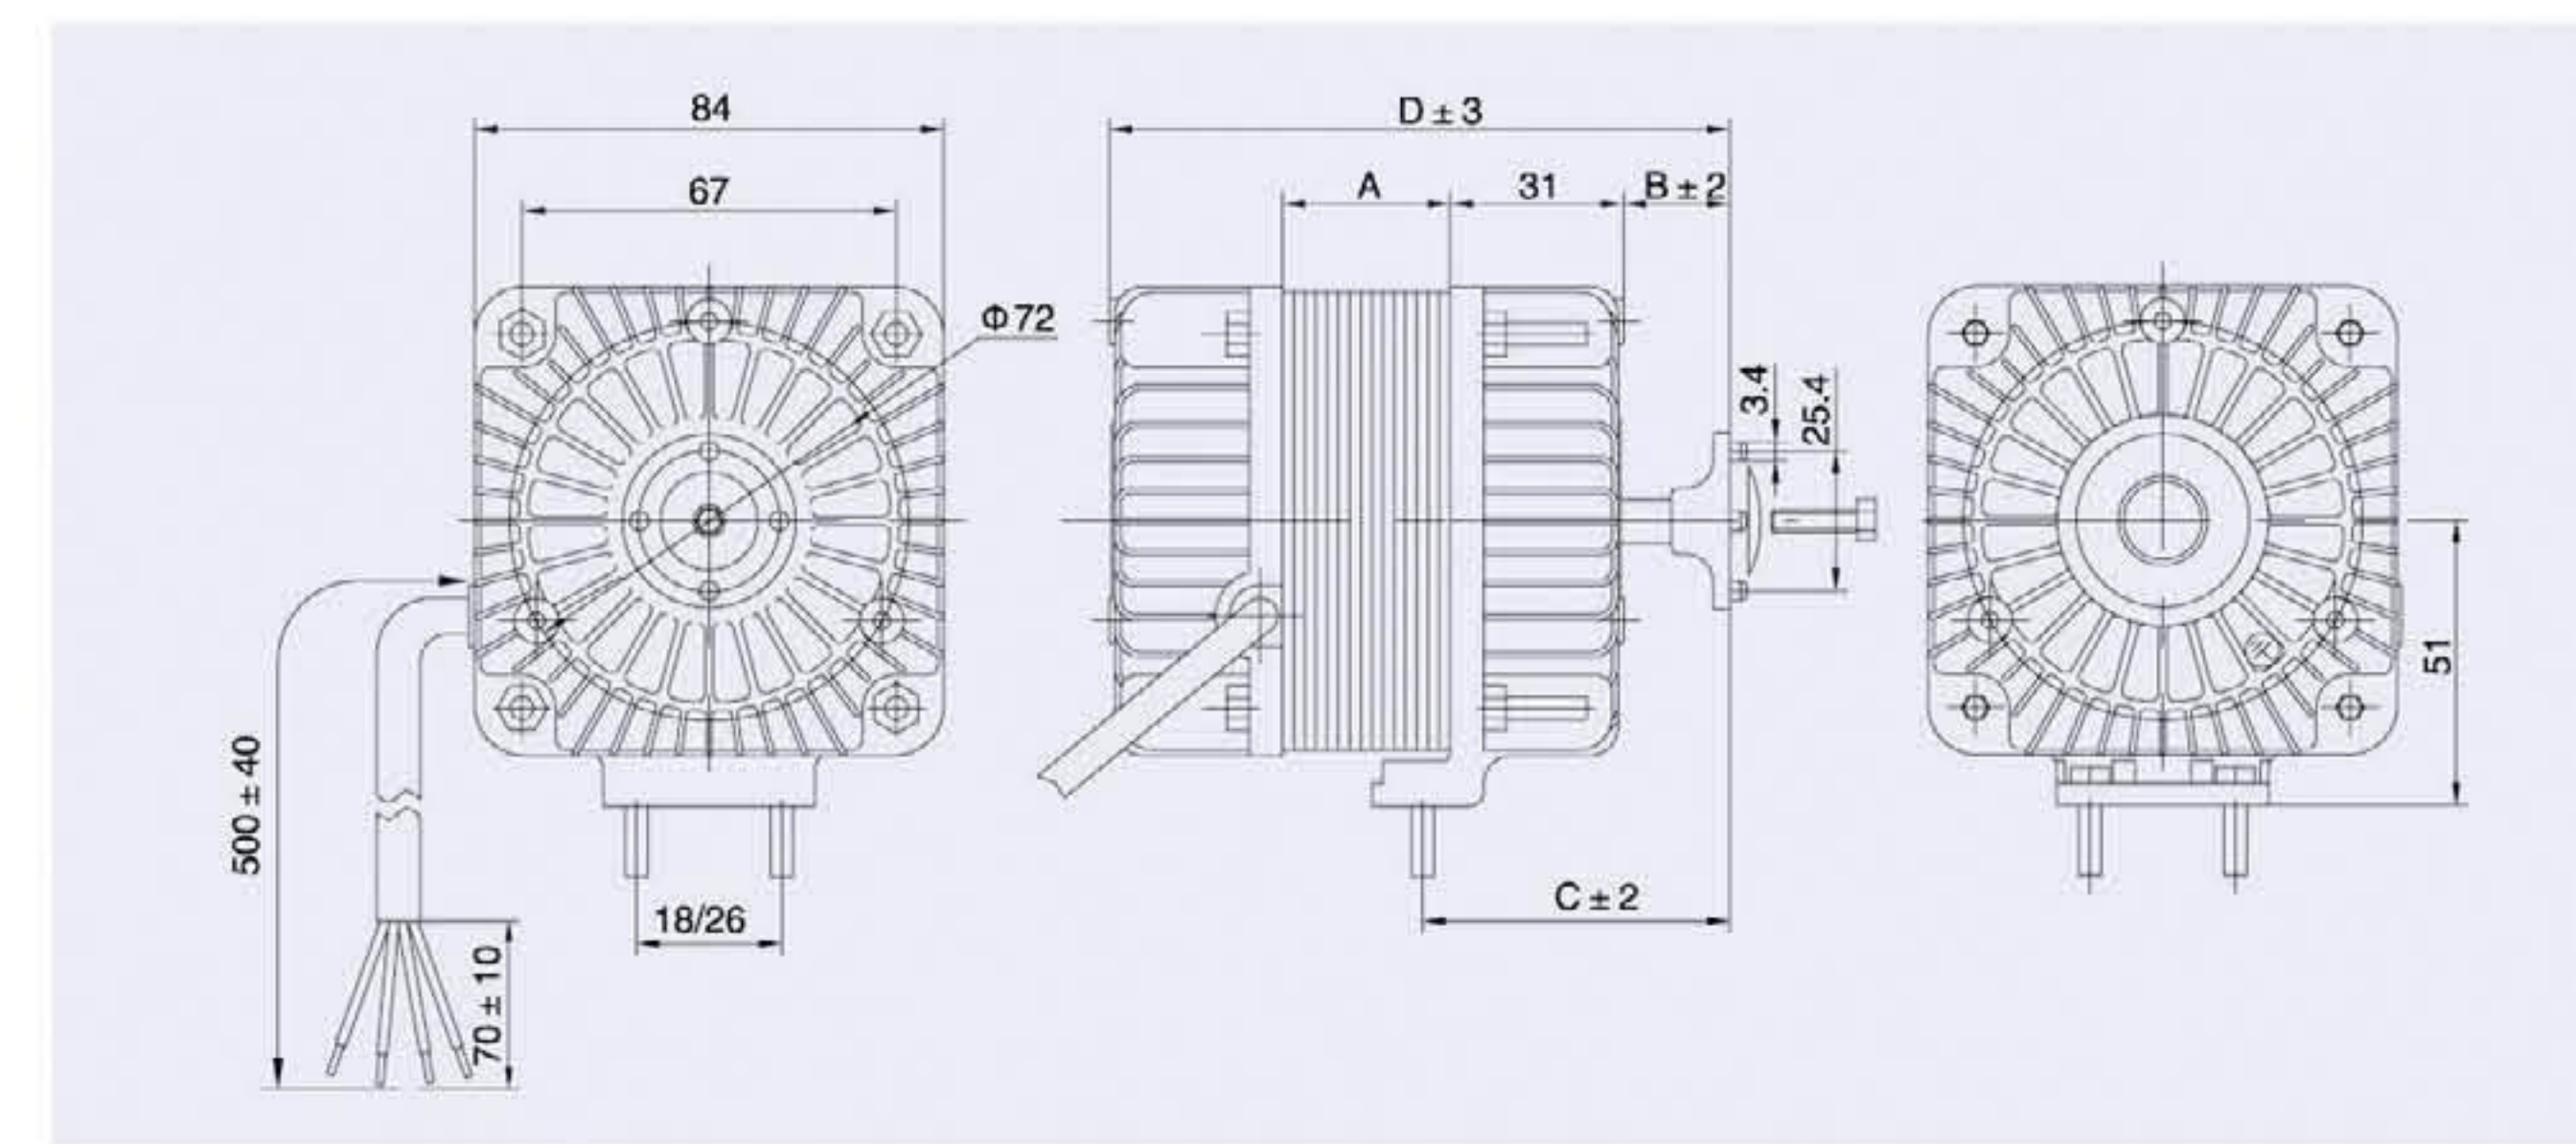

ECM 电子整流直流无刷电机 Electronically Commutated Motor

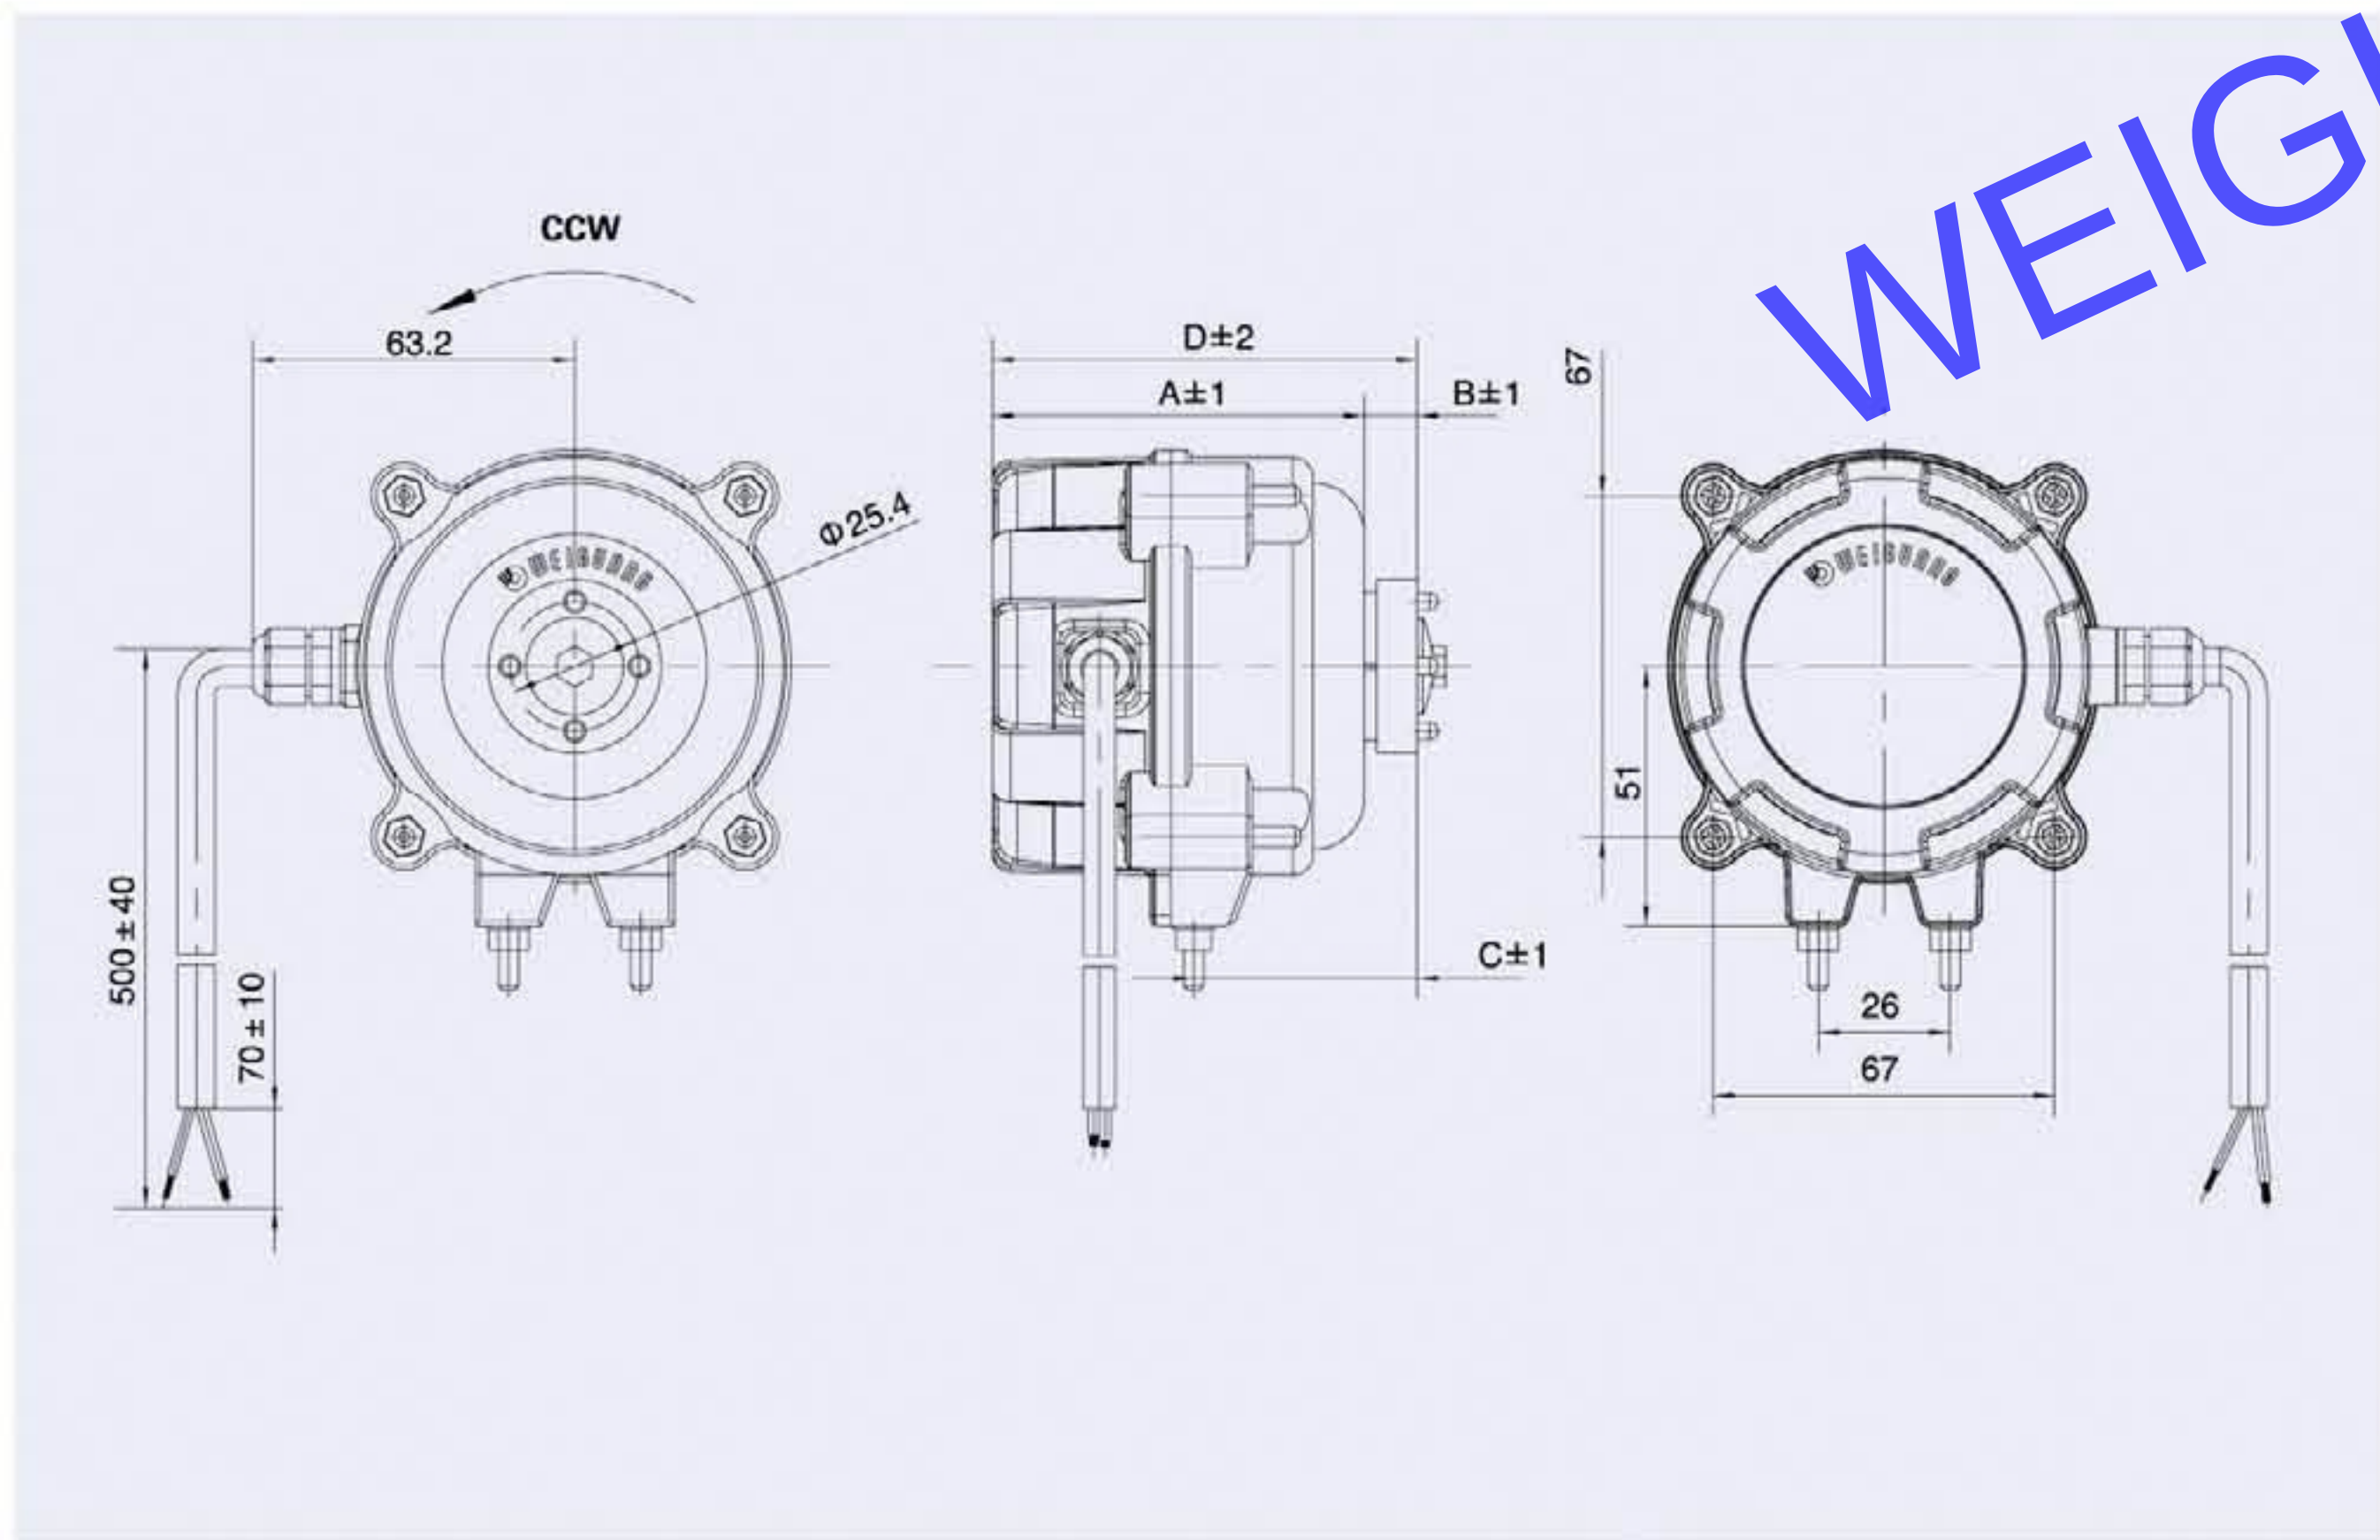

ECM 电子整流直流无刷电机 Electronically Commutated Motor

TYPE 型号	VOLTAGE 额定电压 V	FREQUENCY 频率 Hz	RATED INPUT 额定功率 W	SPEED 额定转速 r/min	NET WEIGHT 净重 kg	A mm	B mm	C mm	D mm	LICENSE 认证
ECM7108	230	50/60	2.5~7.5	1300	0.5	73	10.4	44	83.4	CCC CE
	115	50/60	2.5~7.5	1550	0.5	73	10.4	44	83.4	CCC CE
ECM7112	230	50/60	2.5~23.5	1300	0.6	77	10.4	44	87.4	CCC CE
	115	50/60	2.5~23.5	1550	0.6	77	10.4	44	87.4	CCC CE

转速1300r/min时不同负载下的功耗:
Energy Consumption Under Different Load in 1300r/min

TYPE 型号	ANGLE 角度	ECM7108	ECM7112	ECM7108	ECM7112	ECM7108	ECM7112	ECM7108	ECM7112	ECM7108	ECM7112
		22°		25°		28°		31°		34°	
BLADE 叶片	INPUT(W)										
Φ154		2.5	—	2.6	—	3.2	—	3.6	—	4.1	—
Φ172		3.3	—	3.6	—	4.2	—	5.1	4.8	6.0	5.6
Φ200		4.8	4.4	5.8	5.2	6.5	5.3	—	7.1	—	7.8
Φ230		—	9.7	—	12	—	14.8	—	17.5	—	20
Φ254		—	15.1	—	18.5	—	23.5	—	—	—	—

- 特殊转速要求，例如1800r/min，可按客户要求定制。请与销售人员联系。
- Different motor speed, for example 1800r/min, could be specialized made for customer. Please contact our sales service for further information.