

SPECIFICATIONS OF COMPRESSOR

Model No: 3CC205SA0M

Output : 12 HP



Panasonic Appliances Compressor (Dalian) Co., Ltd.


GENERAL SPECIFICATIONS

Model No:	3CC205SA0M		
Application			
Evaporating Temp Range	(°C)	-25.0 ~ 10.0	
Refrigerant		R404A	
Compressor Cooling		Natural Cooling	
Rated Performance			
Cooling Capacity	(W)	23,000	
Input	(W)	9,700	
Current	(A)	16.6	
Revolution	(min ⁻¹)	2,900	
Sound Level	(dB(A))	—	
Rating Conditions			
Power Source		3-PH	50Hz 380V
Evaporating Temp	(°C)	-6.5	
Condensing Temp	(°C)	43.5	
Suction Gas Temp	(°C)	18.5	
Liquid Temp	(°C)	43.5	
Ambient Temp	(°C)	35.0	
Measuring Point of Sound Level			
Distance from the Compressor	(m)	1.0	
Compressor			
Design		Hermetic Scroll	
Displacement	(cm ³)	205.4	
Suction Line Connection	(Φ mm OD)	25.4	
Discharge Line Connection	(Φ mm OD)	19.05	
Oil	(ml)	2800 (FV68S)	
Mass(Incl.Oil)	(kg)	70.5	
Motor			
Type		3-PH Induction Motor (3IR)	
Pole		2	
Rated Power Source		3-PH	50Hz 380-415V
Voltage Range	(V)	342~456	
Starting Current	(A)	96	

Panasonic Appliances Compressor (Dalian) Co., Ltd.



PERFORMANCE CURVE

Code No.	3CC205SA0M
Power Source	3-PH 50Hz 380V
Condensing Temp. (°C)	20, 30, 35, 40, 43.5, 50, 55, 60
Suction Gas Superheat (K)	18.5
Sub Cooled (K)	0
Compressor Cooling	Natural Cooling
Refrigerant	R404A

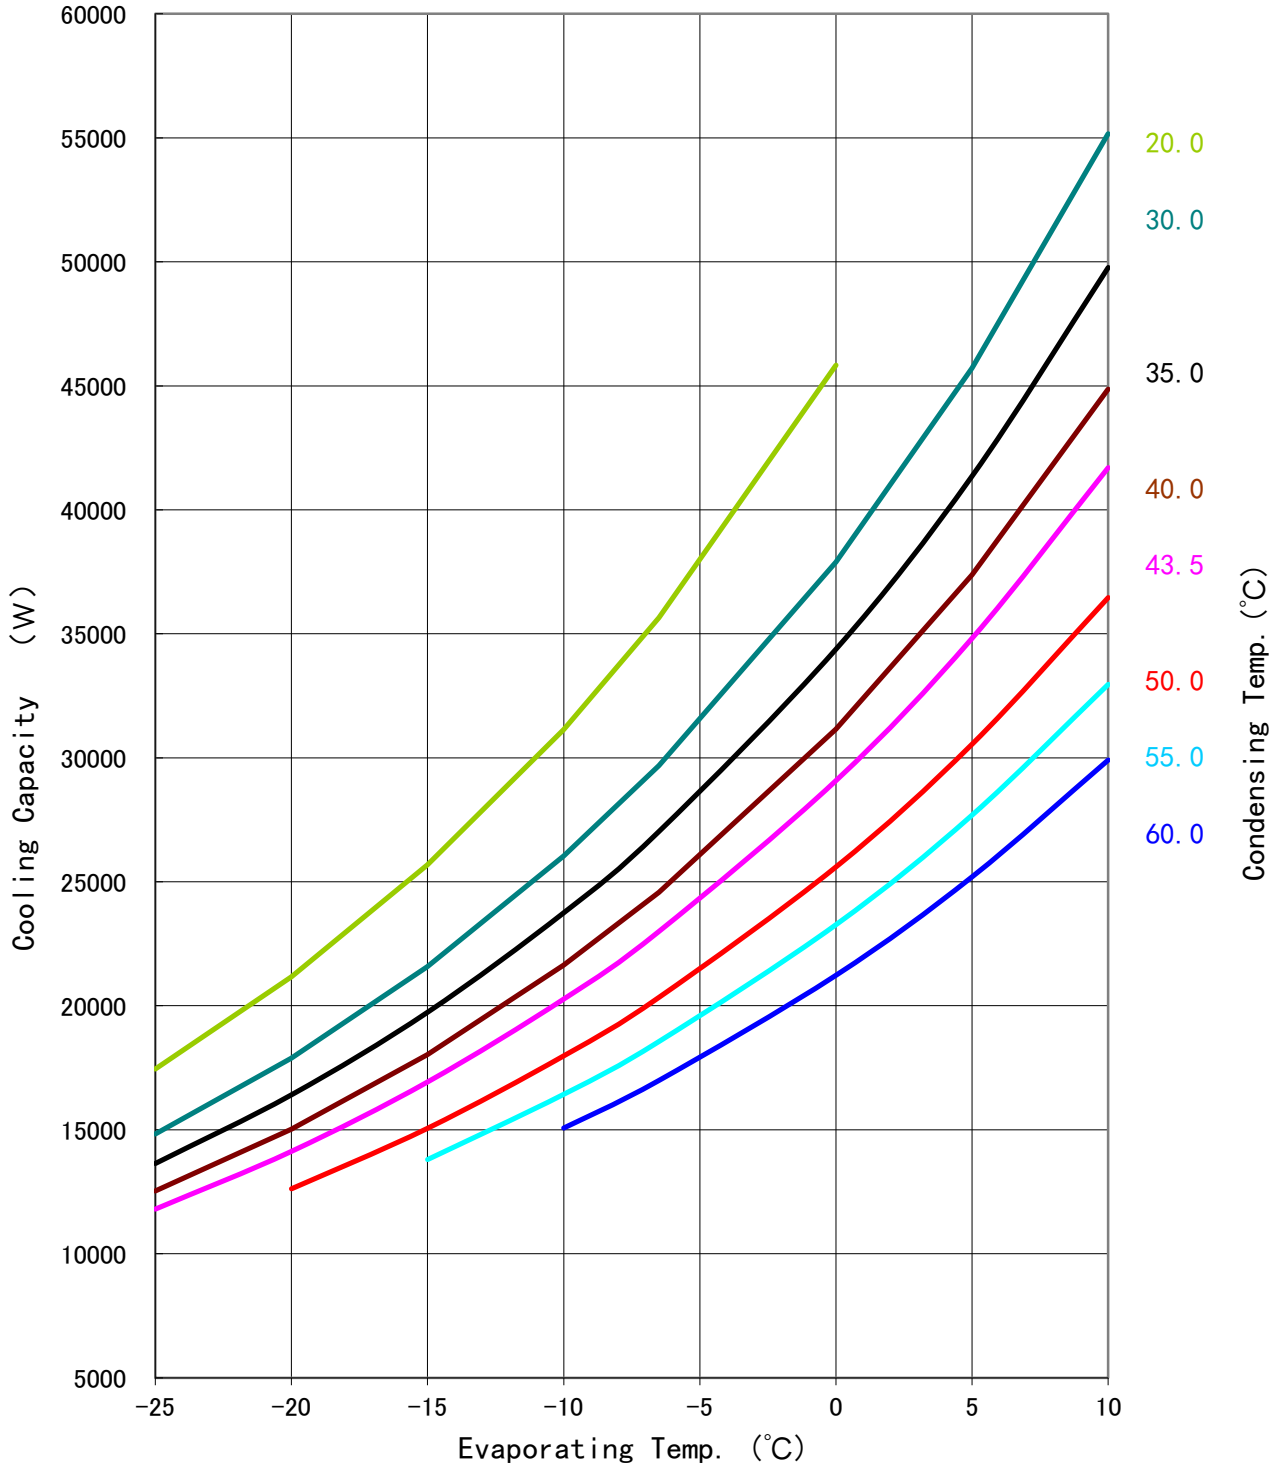

PERFORMANCE CURVE

Code No.	3CC205SA0M
Power Source	3-PH 50Hz 380V
Condensing Temp. (°C)	20, 30, 35, 40, 43.5, 50, 55, 60
Suction Gas Superheat (K)	18.5
Sub Cooled (K)	0
Compressor Cooling	Natural Cooling
Refrigerant	R404A

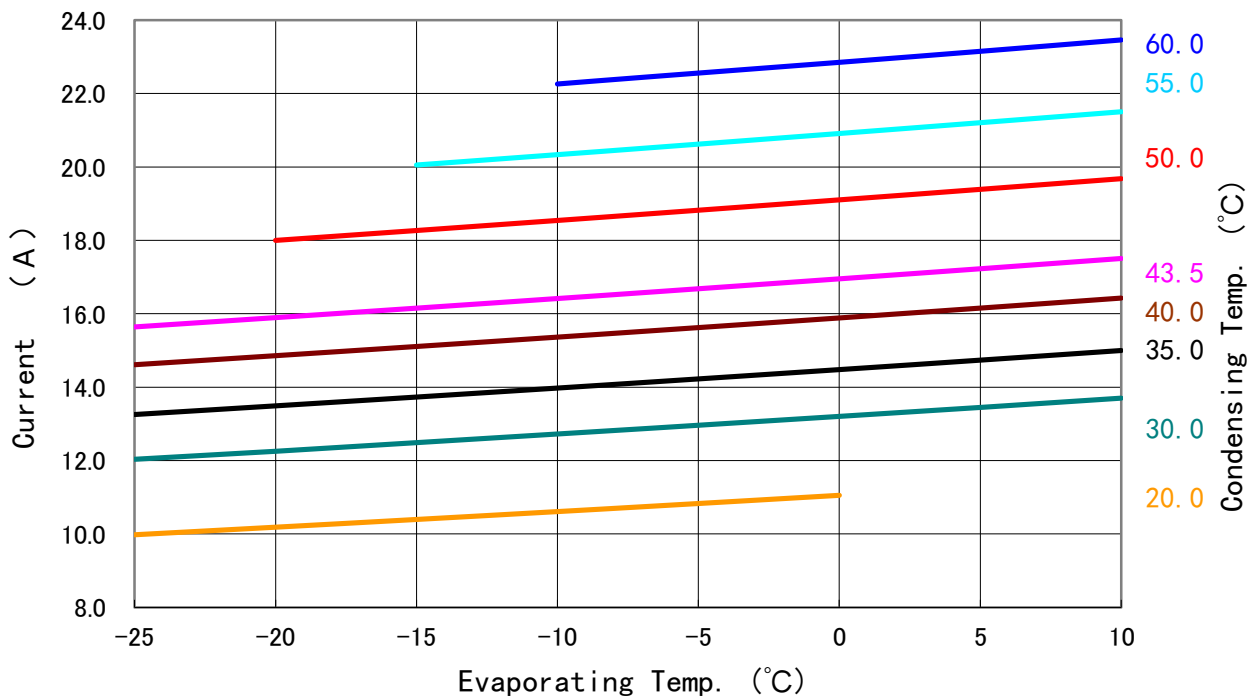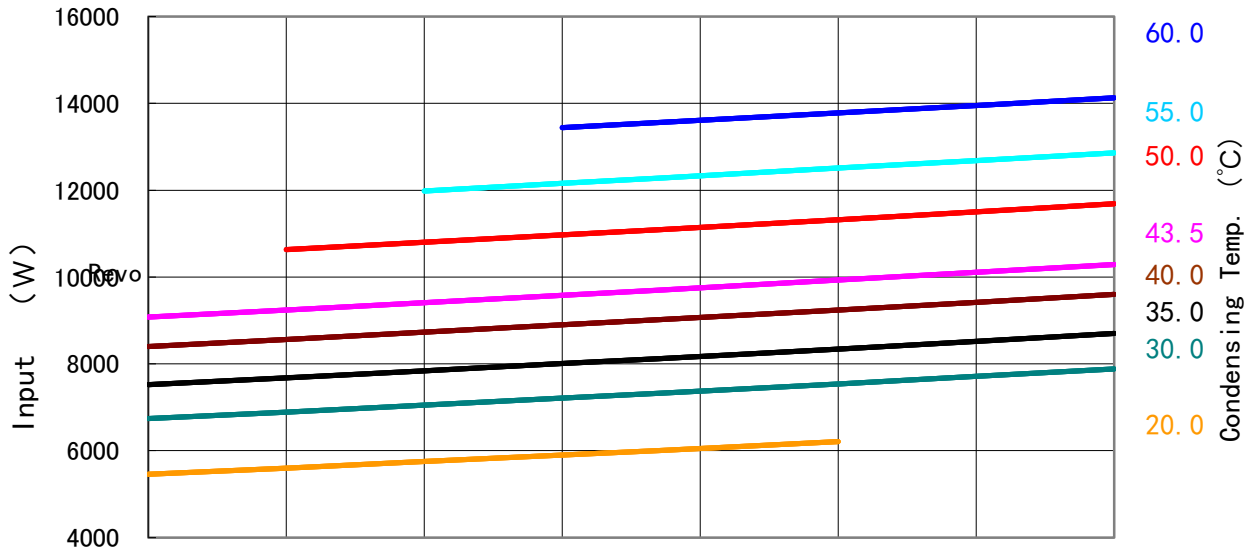

PERFORMANCE DATA

Code No.	3CC205SAOM
Power Source	3-PH 50Hz 380V
Condensing Temp. (°C)	20, 30, 35, 40, 43.5, 50, 55, 60
Suction Gas Superheat (K)	18.5
Sub Cooled (K)	0
Compressor Cooling	Natural Cooling
Refrigerant	R404A

Cooling Capacity (W)

		Evaporating Temp. (°C)							
		-25	-20	-15	-10	-6.5	0	5	10
Condensing Temp. (°C)	20.0	17,450	21,170	25,680	31,150	35,650	45,830		
	30.0	14,830	17,890	21,580	26,040	29,690	37,900	45,720	55,160
	35.0	13,640	16,410	19,740	23,750	27,030	34,380	41,360	49,770
	40.0	12,530	15,030	18,030	21,640	24,580	31,160	37,380	44,860
	43.5	11,800	14,130	16,930	20,270	23,000	29,080	34,820	41,700
	50.0		12,620	15,060	17,980	20,340	25,600	30,550	36,460
	55.0			13,800	16,430	18,560	23,270	27,690	32,960
	60.0				15,070	16,990	21,230	25,200	29,910

Input (W)

		Evaporating Temp. (°C)							
		-25	-20	-15	-10	-6.5	0	5	10
Condensing Temp. (°C)	20.0	5,460	5,600	5,750	5,900	6,000	6,210		
	30.0	6,740	6,890	7,050	7,210	7,320	7,540	7,710	7,880
	35.0	7,520	7,680	7,840	8,010	8,120	8,340	8,520	8,700
	40.0	8,400	8,560	8,730	8,900	9,020	9,240	9,420	9,600
	43.5	9,080	9,240	9,410	9,580	9,700	9,930	10,110	10,290
	50.0		10,630	10,800	10,970	11,090	11,320	11,500	11,690
	55.0			11,980	12,160	12,280	12,510	12,680	12,860
	60.0				13,440	13,560	13,780	13,950	14,130

Current (A)

		Evaporating Temp. (°C)							
		-25	-20	-15	-10	-6.5	0	5	10
Condensing Temp. (°C)	20.0	10.0	10.2	10.4	10.6	10.8	11.1		
	30.0	12.0	12.3	12.5	12.7	12.9	13.2	13.5	13.7
	35.0	13.3	13.5	13.7	14.0	14.1	14.5	14.7	15.0
	40.0	14.6	14.9	15.1	15.4	15.5	15.9	16.2	16.4
	43.5	15.6	15.9	16.2	16.4	16.6	17.0	17.2	17.5
	50.0		18.0	18.3	18.5	18.7	19.1	19.4	19.7
	55.0			20.1	20.3	20.5	20.9	21.2	21.5
	60.0				22.3	22.5	22.9	23.2	23.5

Massflow (kg/H)

		Evaporating Temp. (°C)							
		-25	-20	-15	-10	-6.5	0	5	10
Condensing Temp. (°C)	20.0	331	421	529	656	756	967		
	30.0	346	420	517	636	732	939	1,124	1,331
	35.0	353	420	511	626	720	925	1,111	1,319
	40.0	360	420	506	616	708	912	1,097	1,308
	43.5	365	421	502	609	700	902	1,088	1,300
	50.0		421	495	597	685	885	1,071	1,285
	55.0			490	588	674	872	1,058	1,274
	60.0				578	662	859	1,045	1,263

COP (W/W)

		Evaporating Temp. (°C)							
		-25	-20	-15	-10	-6.5	0	5	10
Condensing Temp. (°C)	20.0	3.20	3.78	4.47	5.28	5.94	7.38		
	30.0	2.20	2.60	3.06	3.61	4.06	5.03	5.93	7.00
	35.0	1.81	2.14	2.52	2.97	3.33	4.12	4.85	5.72
	40.0	1.49	1.76	2.07	2.43	2.73	3.37	3.97	4.67
	43.5	1.30	1.53	1.80	2.12	2.37	2.93	3.44	4.05
	50.0		1.19	1.39	1.64	1.83	2.26	2.66	3.12
	55.0			1.15	1.35	1.51	1.86	2.18	2.56
	60.0				1.12	1.25	1.54	1.81	2.12

Coefficients of Polynomial Formula

	Heating Capacity (W)	Input (W)	Current (A)	Massflow (kg/H)
C1	6.603747E+04	4.672646E+03	8.352903E+00	1.025217E+03
C2	2.614927E+03	2.545799E+01	3.694185E-02	3.533930E+01
C3	-1.129201E+03	3.925548E+01	8.160860E-02	-2.955132E+00
C4	4.087489E+01	9.923254E-02	1.069878E-04	2.603089E-01
C5	-4.683466E+01	3.901245E-01	4.251165E-04	-2.047896E-02
C6	6.388860E+00	1.875455E+00	2.667710E-03	3.003501E-03
C7	2.395384E-01	-4.625420E-06	1.842073E-07	-2.518887E-07
C8	-4.730788E-01	-1.124164E-03	-4.803202E-07	6.010140E-03
C9	2.510302E-01	-3.769111E-03	-5.551994E-07	3.848944E-05
C10	-1.120986E-06	9.359162E-08	5.095587E-11	1.412740E-09

$$X=C1+C2*(S)+C3*D+C4*(S^2)+C5*(S*D)+C6*(D^2)+C7*(S^3)+C8*(D*S^2)+C9*(S*D^2)+C10*(D^3)$$

X——CAPACITY (W) OR POWER (W) OR CURRENT (A)

S——EVAPORATING TEMP, ° C

D——CONDENSING TEMP, ° C

Operating Envelope

Refrigerant : R404A

Suction Gas Temp:18.5°C

Sub Cooled: 0 K

